



Changelog IDM Kitchen/Bathroom

Version 3.0.0

This changelog describes all innovations, enhancements and corrections that are made available with the current version **IDM 3.0.0** (compared to version 2.8.1) both in the XML schema and in the documentation.

Version IDM 3.0.0 is published on 01.12.2022 and becomes valid from 01.02.2023.

Content:

Decision of: Type Page
(date)

Released	1. Catalogue identification and versioning				3
	1.1.	New element CATALOG_ID under CATALOG_IDENTIFICATION	2021-09-29	A	3
	1.2.	CATALOG_YEAR under CATALOG is deleted	2021-09-29	R	4
	1.3.	Move MAJOR_NO and FILE_RELEASE_DATE to CATALOG_IDENTIFICATION	2021-09-29	C	5
	1.4.	New element MINOR_NO under CATALOG_IDENTIFICATION	2021-09-29	A	6
	1.5.	CATALOG_NUMBER below CATALOG is deleted	2021-09-29	R	7
	2. Longer article numbers				7
	2.1.	SUBCONTRACTOR_ITEM_NO increased to 25 digits	2021-09-29	C	7
	3. Extended possibilities in restrictions				8
	3.1.	New element OPTION_GROUPS with sub-elements	2022-03-22	A	8
	3.2.	New attributes FEATURE_4_NO and FEATURE_5_NO	2022-03-22	A	11
	3.3.	Changed structure under OPTION_COMBINATION	2022-03-22	C	12
	3.4.	New element OPTION_GROUP_REF	2022-03-22	A	13
	3.5.	New attribute MANUFACTURER_RECOMMENDATION	2022-03-22	A	14
	4. Deleting material labels				15
	4.1.	TRANSPARENCY and BRIGHTNESS are deleted	2022-03-22	C	15
	5. Percentage additional prices				16
	5.1.	New attributes under PRICE_FEATURE_GROUP_REF below ADDITIONAL_PRICE_GROUP	2022-11-08	A	16
	6. Classification according to ECLASS				19
	6.1.	The previous complex Type CLASSIFICATIONS at the ITEM is deleted	2022-11-17	R	19
	6.2.	New optional complex Type CLASSIFICATION under CATALOG	2022-11-17	A	20
	6.3.	New optional complex Type CLASSIFICATION under SERIES	2022-11-17	A	23
	6.4.	New optional complex Type CLASSIFICATION under ITEM	2022-11-17	A	26
	6.5.	New optional complex type ECLASS_PROPERTY under FEATURE	2022-11-17	A	29
	6.6.	New optional choice between ECLASS_PROPERTY and ECLASS_VALUE under OPTION	2022-11-17	A	30

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



7. Regular expression for key elements					33
7.1.	Changed pattern in the TYPE_NO element under ITEM	2022-03-22	C	33	
7.2.	Changed pattern in the TYPE_NO element below OPTIONAL_ITEMS	2022-03-22	C	34	
7.3.	Changed pattern in the TYPE_NO element below MANDATORY_ITEMS	2022-03-22	C	35	
7.4.	Changed pattern in the TYPE_NO element below OPERATION_ITEM	2022-03-22	C	36	
7.5.	Changed pattern in element SUBCONTRACTOR_ITEM_NO	2022-06-28	C	37	
7.6.	Changed pattern in the element OLD_TYPE_NO	2022-06-28	C	37	
7.7.	Changed pattern in the TYPE_NO element below BLOCK_PARTS	2022-03-22	C	38	
7.8.	Changed pattern in the TYPE_NO element below MODULE_PARTS	2022-03-22	C	39	
7.9.	Changed pattern in the INTERNAL_ORDER_NO element	2022-06-28	C	40	
7.10.	Changed pattern in the TYPE_NO element below BLOCK_CONDITION	2022-03-22	C	41	
7.11.	Changed pattern in the TYPE_NO element below BLOCK_SALE_PRICE	2022-03-22	C	42	
7.12.	Changed pattern in the TYPE_NO element below CREDIT_SURCHARGE_CLEARING	2022-03-22	C	43	
8. New assignment areas					44
8.1.	New values in the attribute SCOPE_NO	2022-06-28	C	44	
9. Textual changes in the documentation					45
9.1.	Extended descriptions of the variant types according to CSV documentation	2022-03-22	C	45	
9.2.	Explanatory example for multi-language catalogues (e.g. Switzerland) on the elements COUNTRY_ID and ISO_LANGUAGE_ID	2022-03-22	C	46	
9.3.	Changed description of the PRICE element below ADDITIONAL_PRICE_GROUP	2022-11-08	C	47	
9.4.	Changed description of the element BASIC_SHAPE_REFERENCE below SCOPE	2022-06-28	C	47	
9.5.	Concretisation of the element EX_FACTORY_MODIFICATION	2022-11-08	C	48	
9.6.	Adjustment in BASIC_SHAPE_PARAMETERS	2022-03-22	C	49	
9.7.	Note on handling special colours in the OPTION element	2022-03-22	C	50	
9.8.	Adjustment in RESTRICTION to 5-stage	2022-03-22	C	51	
9.9.	Adjustment in FEATURE_1_NO to FEATURE_3_NO to 5-step	2022-03-22	C	52	
9.10.	Changed description of the attribute VALIDATION_TYPE	2022-03-22	C	52	

Unreleased*	1. Best Practices					
	1.1.	On the subject of EX_FACTORY_MODIFICATION				
	1.2.	for uniformly permissive or non-permissive global restrictions				
	1.3.	for item restrictions that are as simple as possible				

*Indication of any changes envisaged or partially decided for future versions.

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.




Released

Display of all changes noted for version 3.0.0

1. Catalogue identification and versioning

1.1. A New element CATALOG_ID under CATALOG_IDENTIFICATION Decision : 2021-09-29

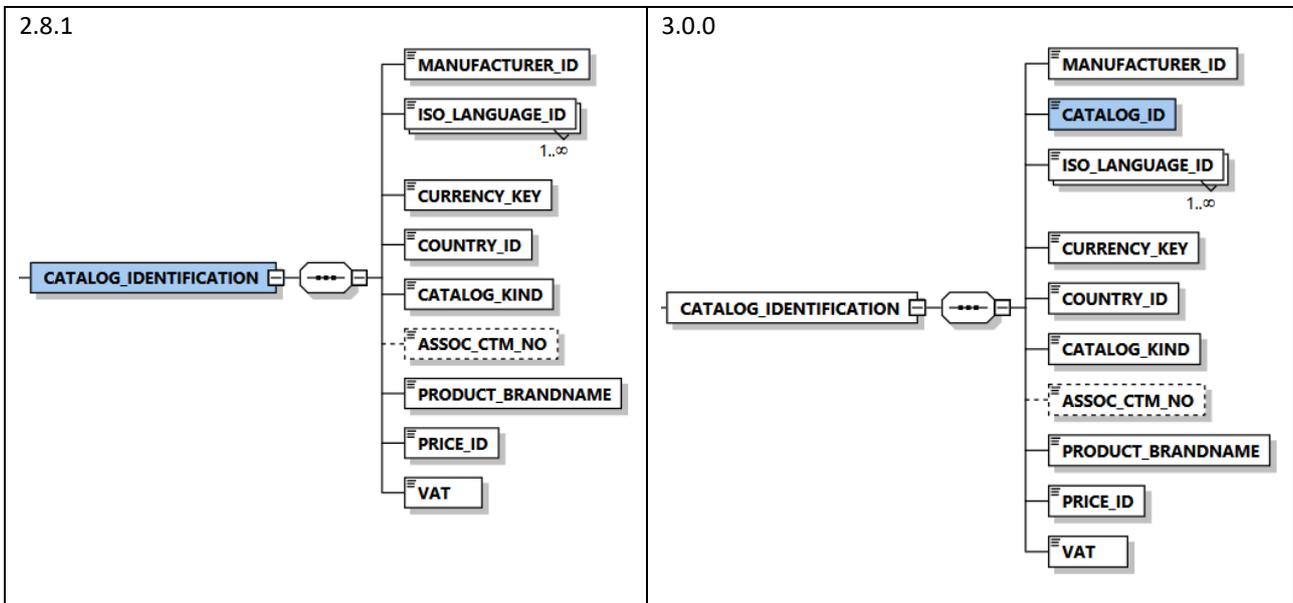

The element CATALOG_ID under CATALOG_IDENTIFICATION is a mandatory field with max. 64 characters and uniquely identifies the catalogue together with the MANUFACTURER_ID.

Description in the documentation:

The manufacturer must enter a unique ID (e.g. GUID) that unequivocally identifies the catalogue here.

A manufacturer catalogue must always have the same ID for the same dealership.


```
<xs:element name="CATALOG_ID">
  <xs:annotation>...</xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="64"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.

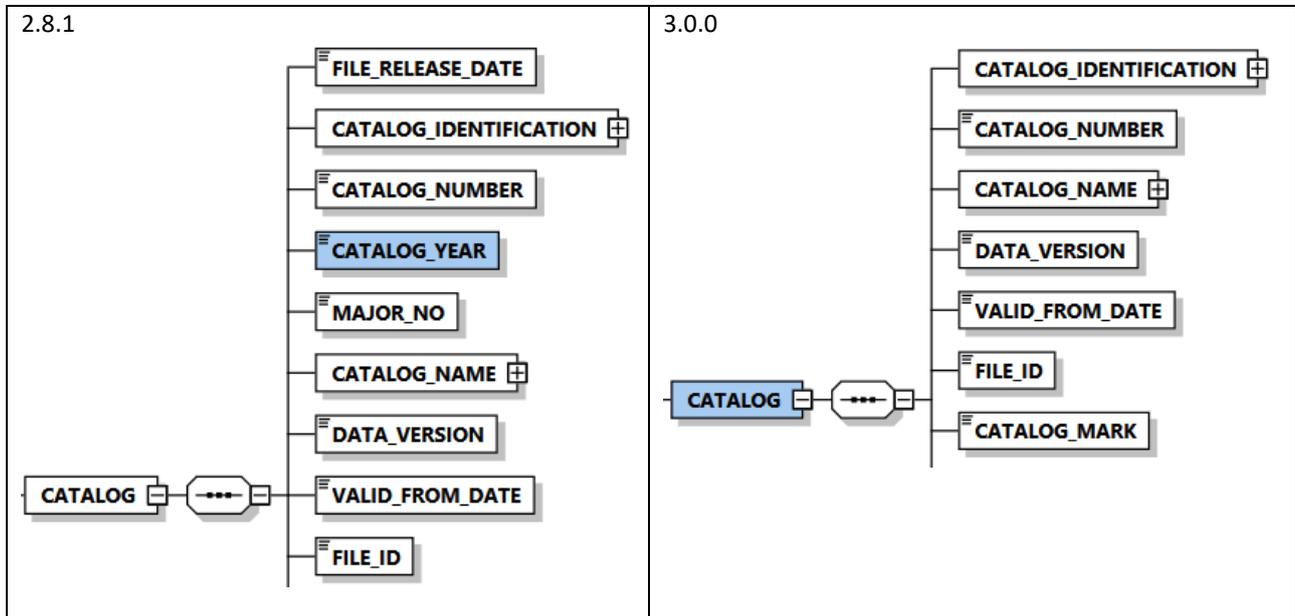


The element CATALOG_YEAR under CATALOG is omitted. It is replaced by the element MAJOR_NO under CATALOG_IDENTIFICATION.



1.3. C Move MAJOR_NO and FILE_RELEASE_DATE to CATALOG_IDENTIFICATION

Decision : 2021-09-29

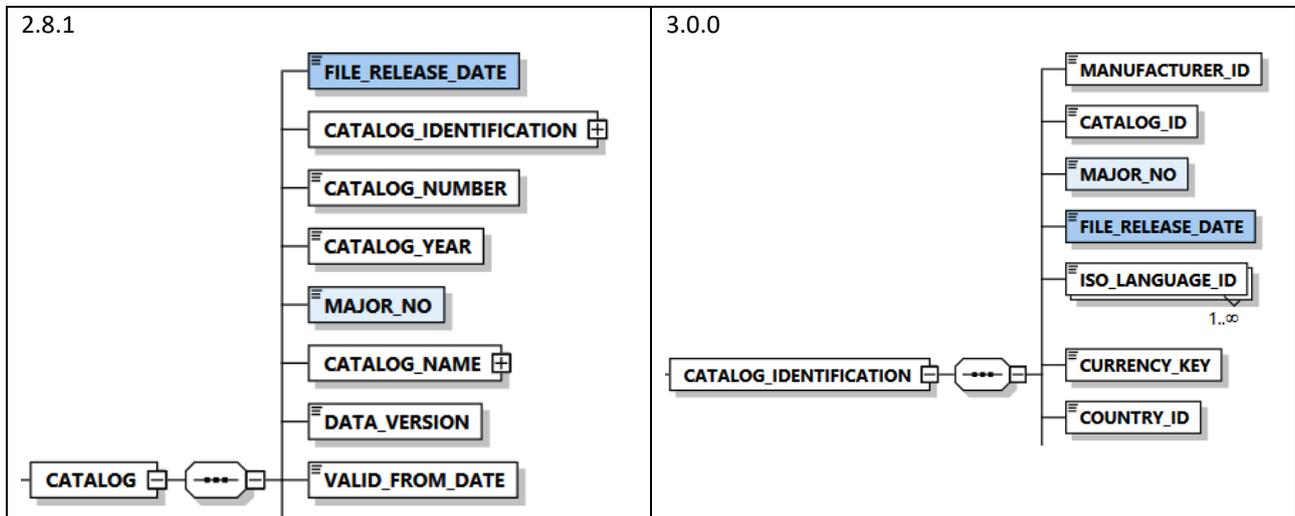

The elements MAJOR_NO and FILE_RELEASE_DATE version the catalogue uniquely together with the new element MINOR_NO.

The FILE_RELEASE_DATE remains unchanged.

MAJOR_NO:

The existing element MAJOR_NO is changed in its function. It now indicates the year of entry of the main catalogue.

Description in the documentation:

The catalogue version number MAJOR_NO indicates the year in which the main catalogue was created. The complete specification of the catalogue version in which a dataset is delivered consists of MAJOR and MINOR.


```
<xs:element name="MAJOR_NO">
  <xs:annotation>...</xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:gYear"/>
  </xs:simpleType>
</xs:element>
<xs:element name="MINOR_NO">...</xs:element>
<xs:element name="FILE_RELEASE_DATE" type="xs:dateTime">
  <xs:annotation>...</xs:annotation>
</xs:element>
```

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.

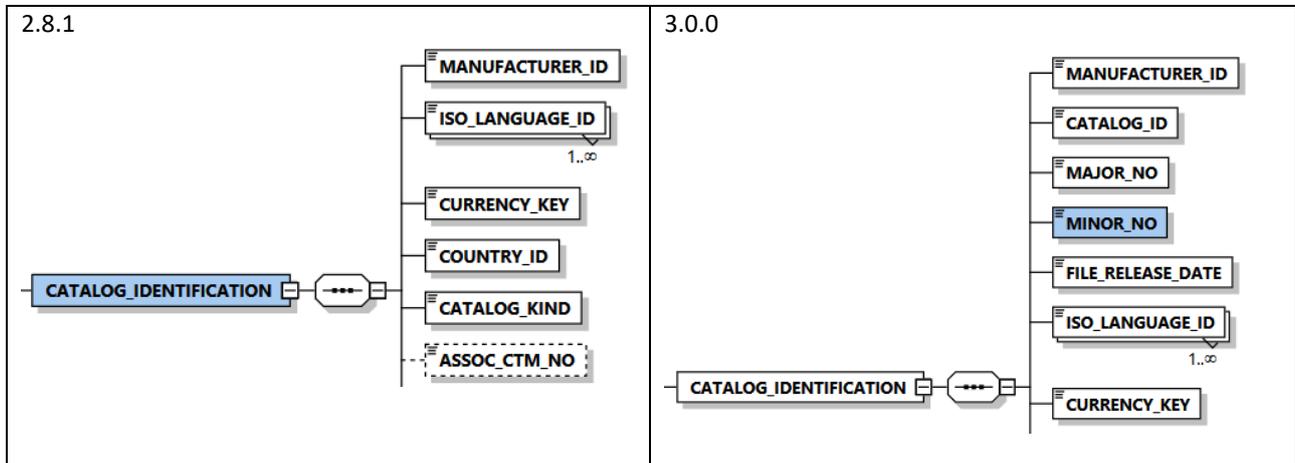

The element MINOR_NO is a mandatory field and contains consecutive numbers as a sub-version number to each MAJOR_NO.

Description in the documentation:


The sub-catalogue version number MINOR_NO is given in consecutive numbers during the year or the period of validity of the main catalogue. The complete specification of the catalogue version in which a dataset is delivered consists of MAJOR and MINOR. If the catalogue version MAJOR is changed, the sub-catalogue version is reset to 0.

```
<xs:element name="MINOR_NO">
  <xs:annotation> ... </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:nonNegativeInteger">
      <xs:minInclusive value="1"/>
      <xs:maxInclusive value="999"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```



1.5. R CATALOG_NUMBER below CATALOG is deleted

Decision : 2021-09-29

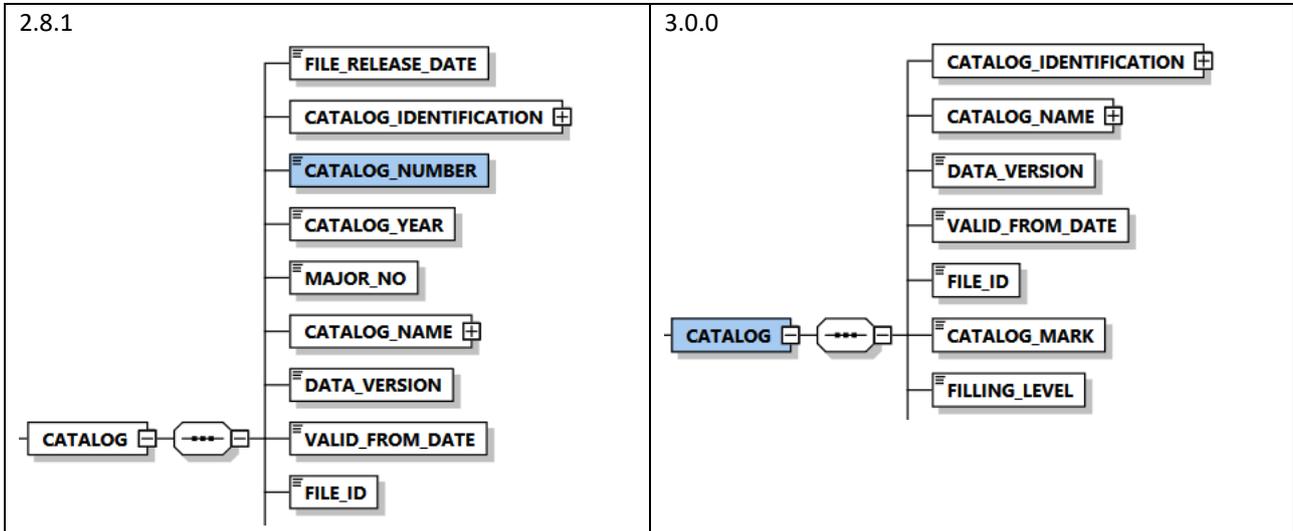

The element CATALOG_NUMBER under CATALOG is omitted.

2. Longer item numbers

2.1. C SUBCONTRACTOR_ITEM_NO increased to 25 digits

Decision : 2021-09-29

```

2.8.1
<xs:element name="SUBCONTRACTOR_ITEM_NO" minOccurs="0">
  <xs:annotation>...</xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="15"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>

3.0.0
<xs:element name="SUBCONTRACTOR_ITEM_NO" minOccurs="0">
  <xs:annotation>...</xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="25"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>

```

The SUBCONTRACTOR_ITEM_NO element can now be filled with 25 characters.

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.


R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



3. Extended possibilities in restrictions

3.1. A New element OPTION_GROUPS with sub-elements Decision : 2022-03-22

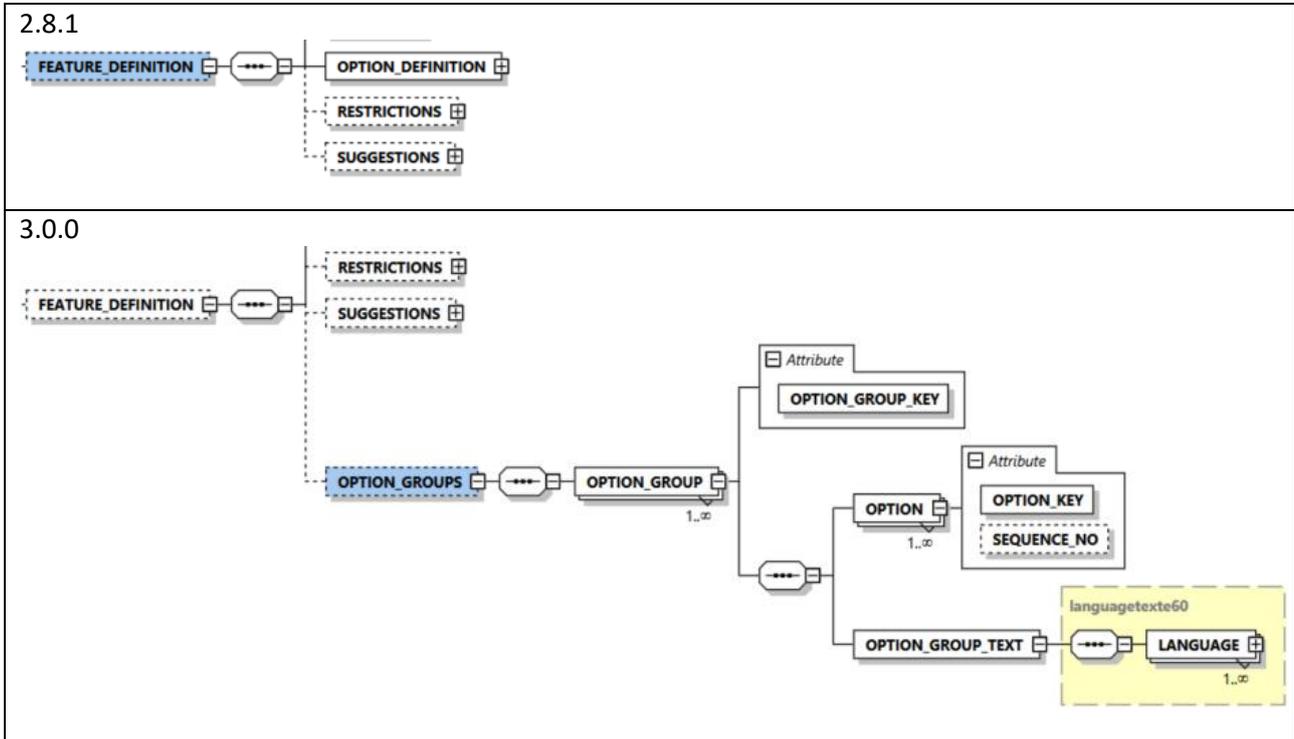

Under OPTION_GROUPS it is possible to group variants independently of a variant type. These can be referenced in the examinations.

OPTION_GROUPS:

The optional element OPTION_GROUPS is a complex type.

Description in the documentation:

This element is used to group sets of several options. They can be referenced in the rules below FEATURE_1_NO to FEATURE_5_NO in the RESTRICTIONS and SUGESTIONS. These options are to be considered as an independent pool and have no connection to a feature.

OPTION_GROUP:

The element OPTION_GROUP is a complex type and can be created as often as desired.



Description in the documentation:

This element is used to define a option group.

It can be referenced in the exams below FEATURE_1_NO to FEATURE_5_NO in the RESTRICTIONS and SUGESTIONS. These variants are to be considered as an independent pool and have no connection to a feature.

OPTION_GROUP_KEY:

The attribute OPTION_GROUP_KEY is of the type NonNegativeInteger and must be specified.

Description in the documentation:

This attribute is used to identify an option group.

OPTION:

The element OPTION is a complex type and can be created as often as desired.

Description in the documentation:

This element is used to reference an option.

OPTION_KEY:

The attribute OPTION_GROUP_KEY is of the type string, has a maximum of 30 characters and is mandatory.

Description in the documentation:

This attribute is used to reference an option.

SEQUENCE_NO:

The attribute SEQUENCE_NO is of the type NonNegativeInteger and is optional.

Description in the documentation:

This attribute defines the order of the options in an option group.

OPTION_GROUP_TEXT:

The element OPTION_GROUP_TEXT is of type languagetext60.

Description in the documentation:

This element contains texts for option groups.




```
<xs:element name="OPTION_GROUPS" minOccurs="0">
  <xs:annotation>[...]</xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="OPTION_GROUP" maxOccurs="unbounded">
        <xs:annotation>[...]</xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="OPTION" maxOccurs="unbounded">
              <xs:annotation>[...]</xs:annotation>
              <xs:complexType>
                <xs:attribute name="OPTION_KEY" use="required">
                  <xs:annotation>[...]</xs:annotation>
                  <xs:simpleType>
                    <xs:restriction base="xs:string">
                      <xs:minLength value="1"/>
                      <xs:maxLength value="30"/>
                    </xs:restriction>
                  </xs:simpleType>
                </xs:attribute>
                <xs:attribute name="SEQUENCE_NO">
                  <xs:annotation>[...]</xs:annotation>
                  <xs:simpleType>
                    <xs:restriction base="xs:nonNegativeInteger"/>
                  </xs:simpleType>
                </xs:attribute>
              </xs:complexType>
            </xs:element>
            <xs:element name="OPTION_GROUP_TEXT" type="languagetexte60">
              <xs:annotation>[...]</xs:annotation>
            </xs:element>
          </xs:sequence>
          <xs:attribute name="OPTION_GROUP_KEY" type="xs:nonNegativeInteger" use="required">
            <xs:annotation>[...]</xs:annotation>
          </xs:attribute>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.

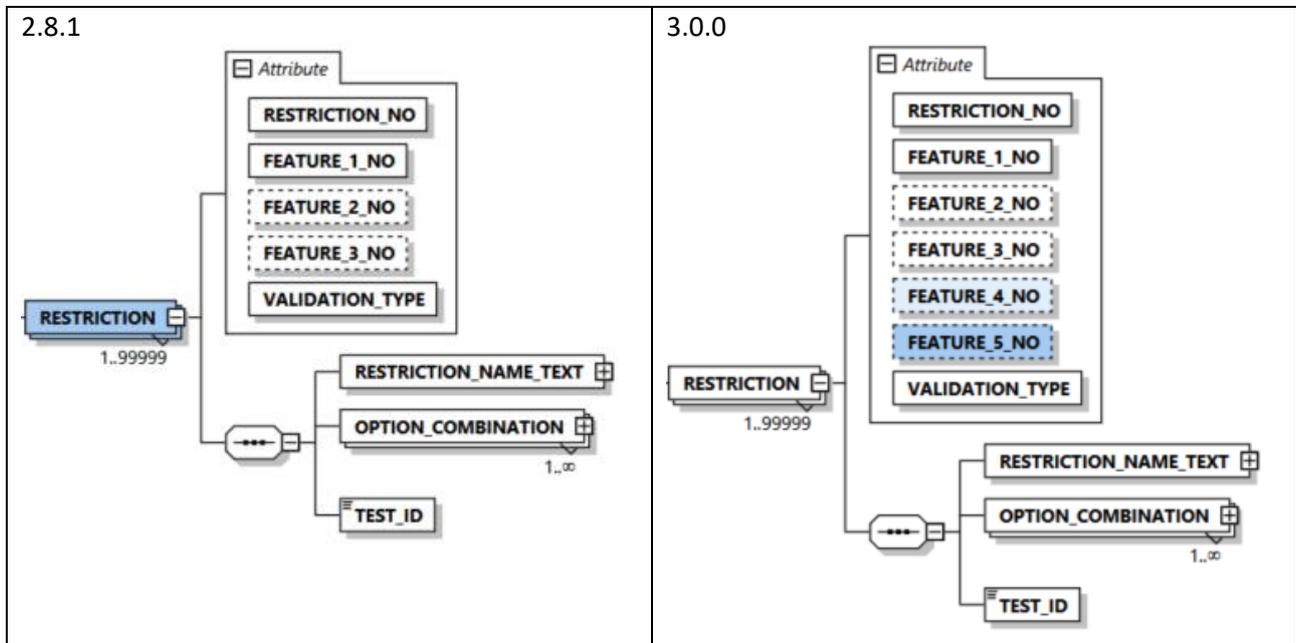

Since examinations may now have 5 levels, the two attributes FEATURE_4_NO and FEATURE_5_NO are added below RESTRICTION. Both are optional and of the type NonNegativeInteger.

Description in the documentation:

The attributes FEATURE_1_NO to FEATURE_5_NO define the different features which are used in the restrictions. The attributes also define the sequence of the features in the restrictions.

In addition, it is possible to check that the features do not change within a restriction.

```

<xs:attribute name="FEATURE_4_NO">
  <xs:annotation>...</xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:nonNegativeInteger">
      <xs:minInclusive value="0"/>
      <xs:maxInclusive value="999"/>
    </xs:restriction>
  </xs:simpleType>
</xs:attribute>
<xs:attribute name="FEATURE_5_NO">
  <xs:annotation>...</xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:nonNegativeInteger">
      <xs:minInclusive value="0"/>
      <xs:maxInclusive value="999"/>
    </xs:restriction>
  </xs:simpleType>
</xs:attribute>

```

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.


R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



3.3. C Changed structure under OPTION_COMBINATION

Decision : 2022-03-22

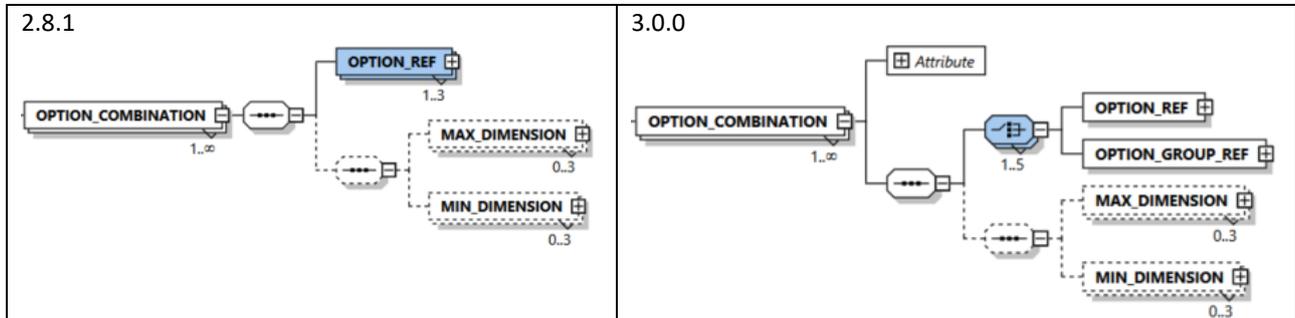

Due to the new possibilities of OPTION_GROUPS, it must also be possible to reference them in the OPTION_COMBINATION. For this purpose, a choice has been built in, which allows a selection between an OPTION_REF or an OPTION_GROUP_REF. Due to the now up to 5-level restriction, the value max Occurs in the choice is set to 5. The OPTION_REF or the OPTION_GROUP_REF behind it is thus only possible once.

```

<xs:element name="OPTION_COMBINATION" maxOccurs="unbounded">
  <xs:annotation>...</xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:choice maxOccurs="5">
        <xs:element name="OPTION_REF">
          <xs:annotation>...</xs:annotation>
          <xs:complexType>
            <xs:attribute name="FEATURE_NO" use="required">
              <xs:annotation>...</xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:nonNegativeInteger">
                  <xs:minInclusive value="0"/>
                  <xs:maxInclusive value="999"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:attribute>
            <xs:attribute name="OPTION_KEY" use="required">
              <xs:annotation>...</xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:minLength value="1"/>
                  <xs:maxLength value="5"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:attribute>
          </xs:complexType>
        </xs:element>
        <xs:element name="OPTION_GROUP_REF">...</xs:element>
      </xs:choice>
      <xs:sequence minOccurs="0">
        <xs:element name="MAX_DIMENSION" minOccurs="0" maxOccurs="3">...</xs:element>
        <xs:element name="MIN_DIMENSION" minOccurs="0" maxOccurs="3">...</xs:element>
      </xs:sequence>
    </xs:sequence>
    <xs:attribute name="MANUFACTURER_RECOMMENDATION" use="optional" default="0">...</xs:attribute>
  </xs:complexType>
</xs:element>


```

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.

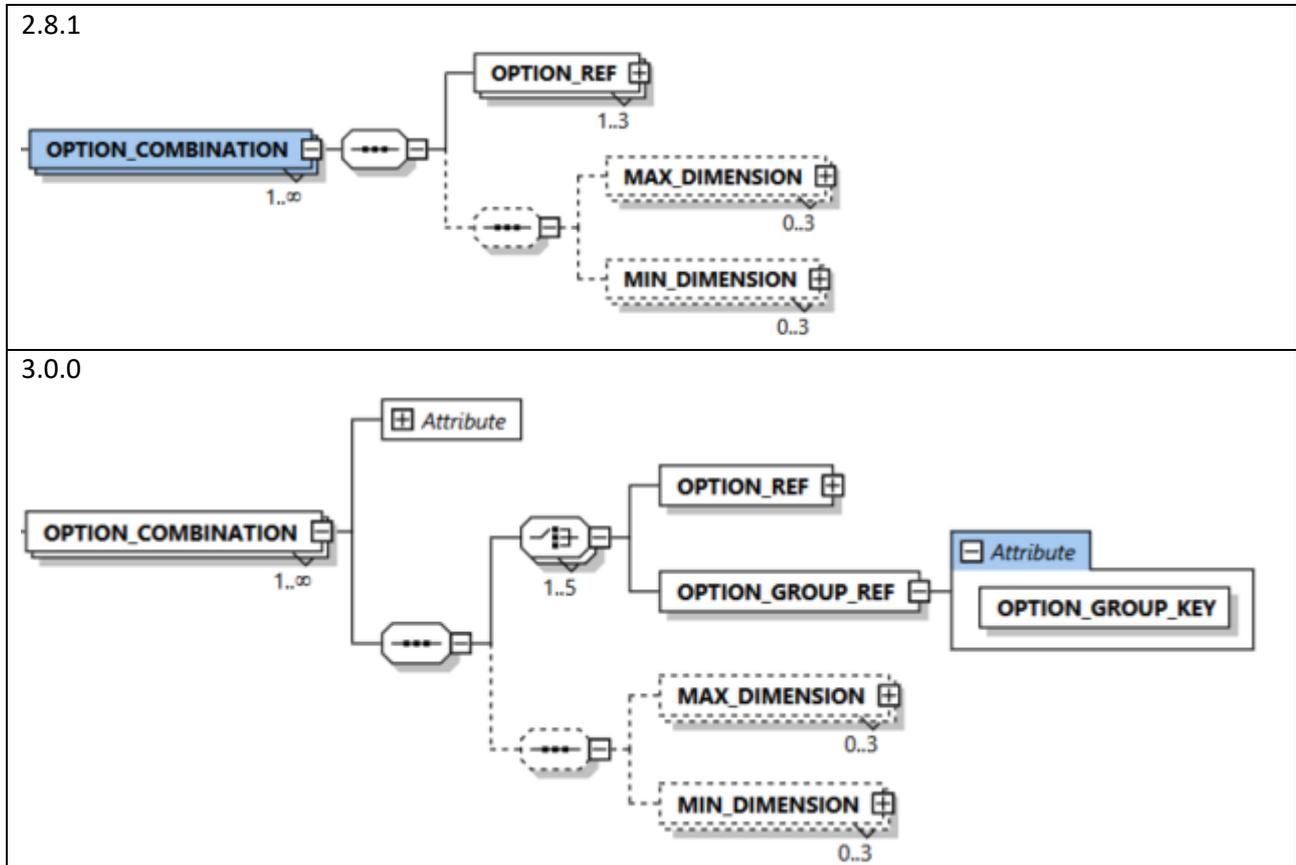

The new element OPTION_GROUP_REF enables referencing in the OPTION_COMBINATION.

OPTION_GROUP_REF:

The element OPTION_GROUP_REF is a complex type and can only be created once within the choice.

Description in the documentation:

In this element, option groups are referenced that are applied in a restriction.

OPTION_GROUP_KEY:

The attribute OPTION_GROUP_KEY is of type NonNegativeInteger and mandatory.

Description in the documentation:

This attribute is used to reference an option group.

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.




```

<xs:element name="OPTION_GROUP_REF">
  <xs:annotation>[...]</xs:annotation>
  <xs:complexType>
    <xs:attribute name="OPTION_GROUP_KEY" use="required">
      <xs:annotation>[...]</xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:nonNegativeInteger"/>
      </xs:simpleType>
    </xs:attribute>
  </xs:complexType>
</xs:element>

```

3.5. A New attribute MANUFACTURER_RECOMMANDATION Decision : 2022-03-22

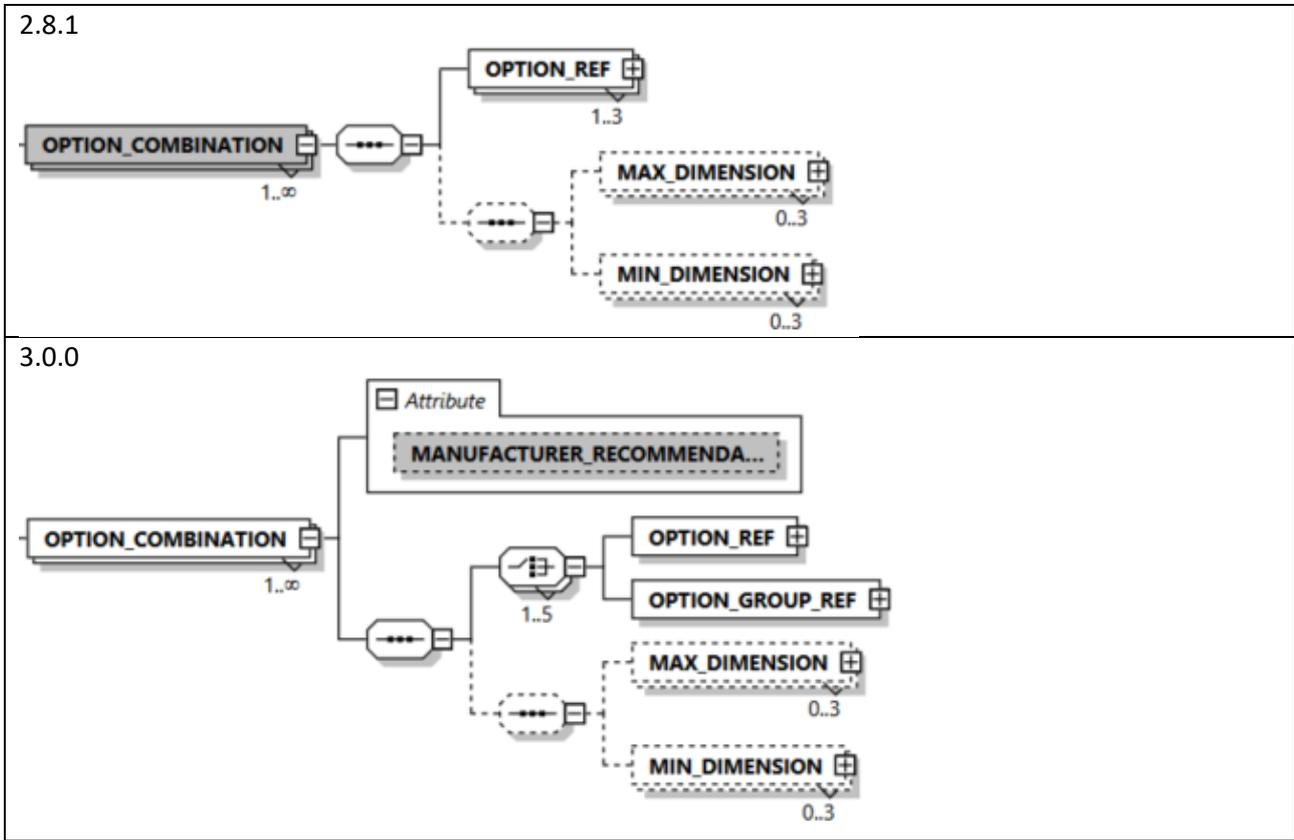

The new optional attribute MANUFACTURER_RECOMMENDATION is of the data type Boolean and marks a option combination as a manufacturer recommendation.

Description in the documentation:

The attribute identifies an option combination as a recommendation of the manufacturer. It may only be set to 1 in permissive tests.

- 0 = no manufacturer recommendation
- 1 = Manufacturer recommendation


A = Added = Adding new elements or attributes
 C = Changed = Changes to existing elements, attributes or descriptive texts.
 R = Removed = Deletion of elements or attributes
 F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



4. Deleting material labels

4.1. C TRANSPARENCY and BRIGHTNESS are deleted

Decision : 2022-06-28

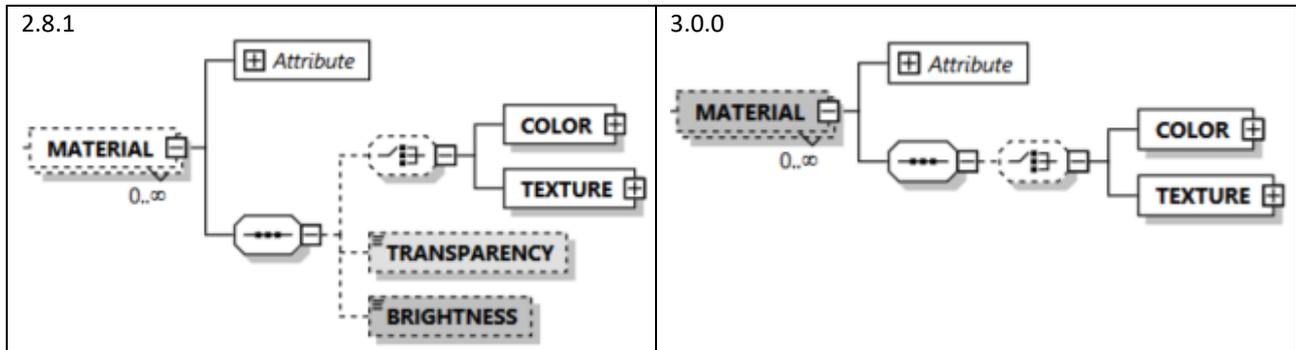

Since the values of the two elements TRANSPARENCY and BRIGHTNESS from the IDM data are not used, they are deleted.

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes


F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



5. Percentage additional prices

5.1. C New attributes under PRICE_FEATURE_GROUP_REF below
ADDITIONAL_PRICE_GROUP

Decision : 2022-03-22

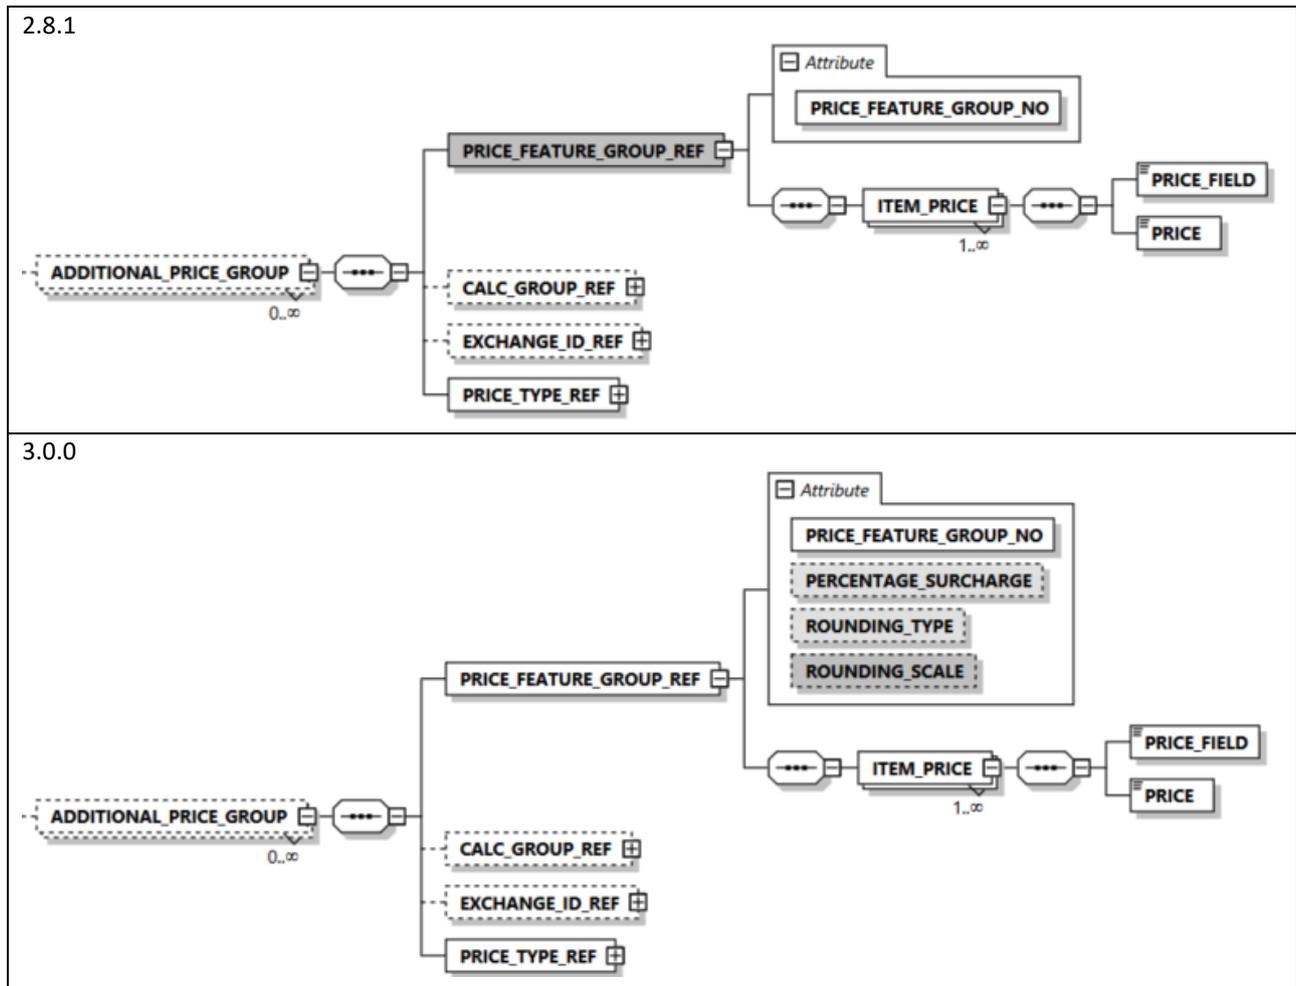

The new attributes PERCENTAGE_SURCHARGE, ROUNDING_TYPE and ROUNDING_SCALE control whether the PRICE element below represents a fixed surcharge or a percentage surcharge and how the result should be rounded in the case of a percentage surcharge.

PERCENTAGE_SURCHARGE:

The PERCENTAGE_SURCHARGE attribute under the PRICE_FEATURE_GROUP_REF is of type Boolean and optional.

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



Description in the documentation:

This element indicates whether the value stored in PRICE (PATH 1) represents a fixed surcharge or a percentage surcharge. The value 0 is the default value.

0 = the value specified under PRICE (PATH 1) corresponds to a fixed, value-based surcharge

1 = the value specified under PRICE (PATH 1) corresponds to a percentage surcharge based on the base price.

Path 1:SERIES/PRODUCT_GROUPS/PRODUCT_GROUP/ITEMS/ITEM/ADDITIONAL_PRICE_GROUP/
PRICE_FEATURE_GROUP_REF

ROUNDING_TYPE:

The optional ROUNDING_TYPE attribute under the PRICE_FEATURE_GROUP_REF is of type positiveInteger and can contain values from 1 to 3.

Description in the documentation:

This element specifies the type of rounding for the price calculated by percentage surcharge:

1 = Round up

2 = Round off

3 = commercial rounding

The value 3 is the default value.

ROUNDING_SCALE:

The optional ROUNDING_SCALE attribute under the PRICE_FEATURE_GROUP_REF is of type integer and can contain values from -3 to 2.

Description in the documentation:

This element specifies to how many digits the price calculated by percentage surcharge should be rounded:

-3 = Laps on 1000s

-2 = rounds to 100s

-1 = rounds to 10s

0 = Round to 1s

1 = Round to 1 decimal place

2 = Round to 2 decimal places

The value 2 is the default value.

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



```
<xs:element name="PRICE_FEATURE_GROUP_REF">
  <xs:annotation>[...]</xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="ITEM_PRICE" maxOccurs="unbounded">[...]</xs:element>
    </xs:sequence>
    <xs:attribute name="PRICE_FEATURE_GROUP_NO" use="required">[...]</xs:attribute>
    <xs:attribute name="PERCENTAGE_SURCHARGE" type="xs:boolean" use="optional" default="0">
      <xs:annotation>[...]</xs:annotation>
    </xs:attribute>
    <xs:attribute name="ROUNDING_TYPE" default="3">
      <xs:annotation>[...]</xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:positiveInteger">
          <xs:minInclusive value="1"/>
          <xs:maxInclusive value="3"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:attribute>
    <xs:attribute name="ROUNDING_SCALE" default="2">
      <xs:annotation>[...]</xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:integer">
          <xs:minInclusive value="-3"/>
          <xs:maxInclusive value="2"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:attribute>
  </xs:complexType>
</xs:element>
```

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes


F = Fixed = Error corrections to existing elements, attributes or descriptive texts.




6. Classification according to ECLASS

6.1. R The previous complex Type CLASSIFICATIONS at the ITEM is deleted

Decision : 2022-11-17

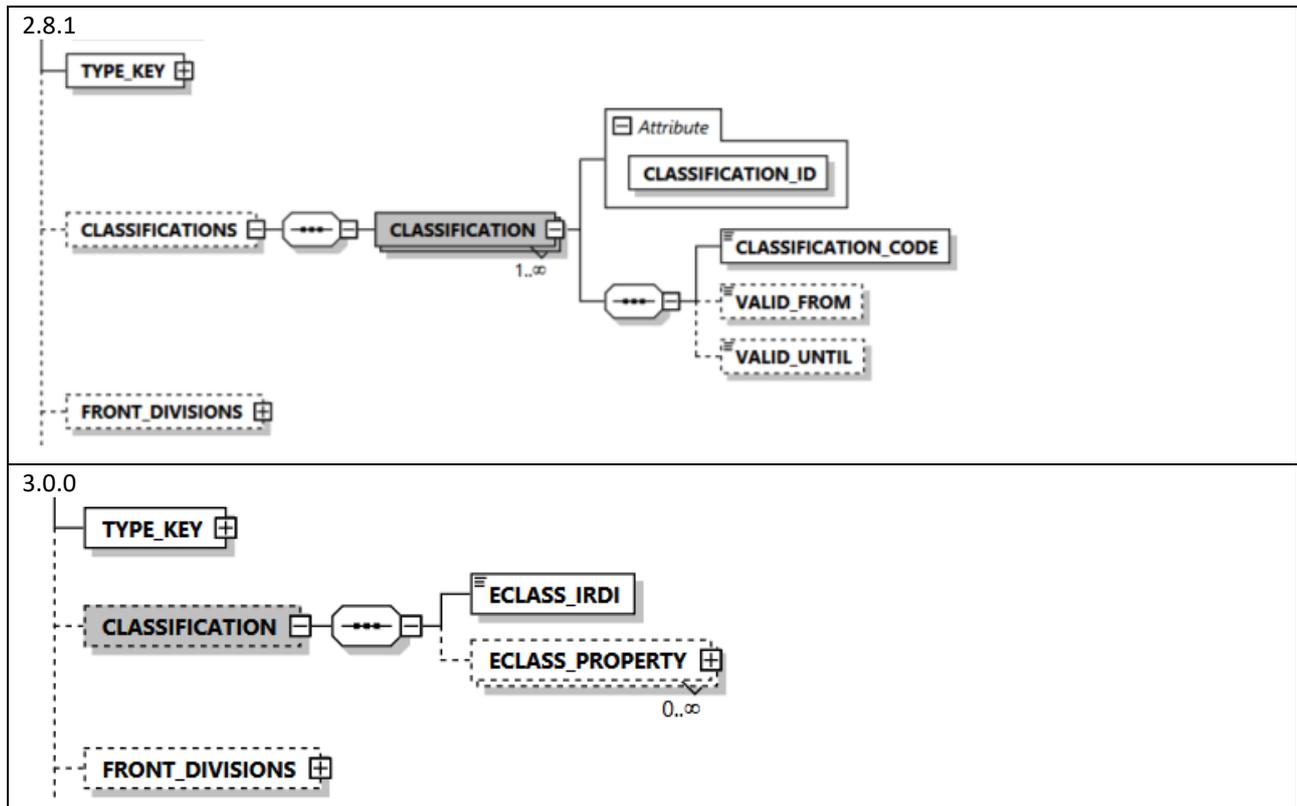

The previous structure for maintaining classification information of several schemas is replaced by purely ECLASS-related and thus completely new elements. The complex type CLASSIFICATIONS with all its sub-elements and attributes is omitted.

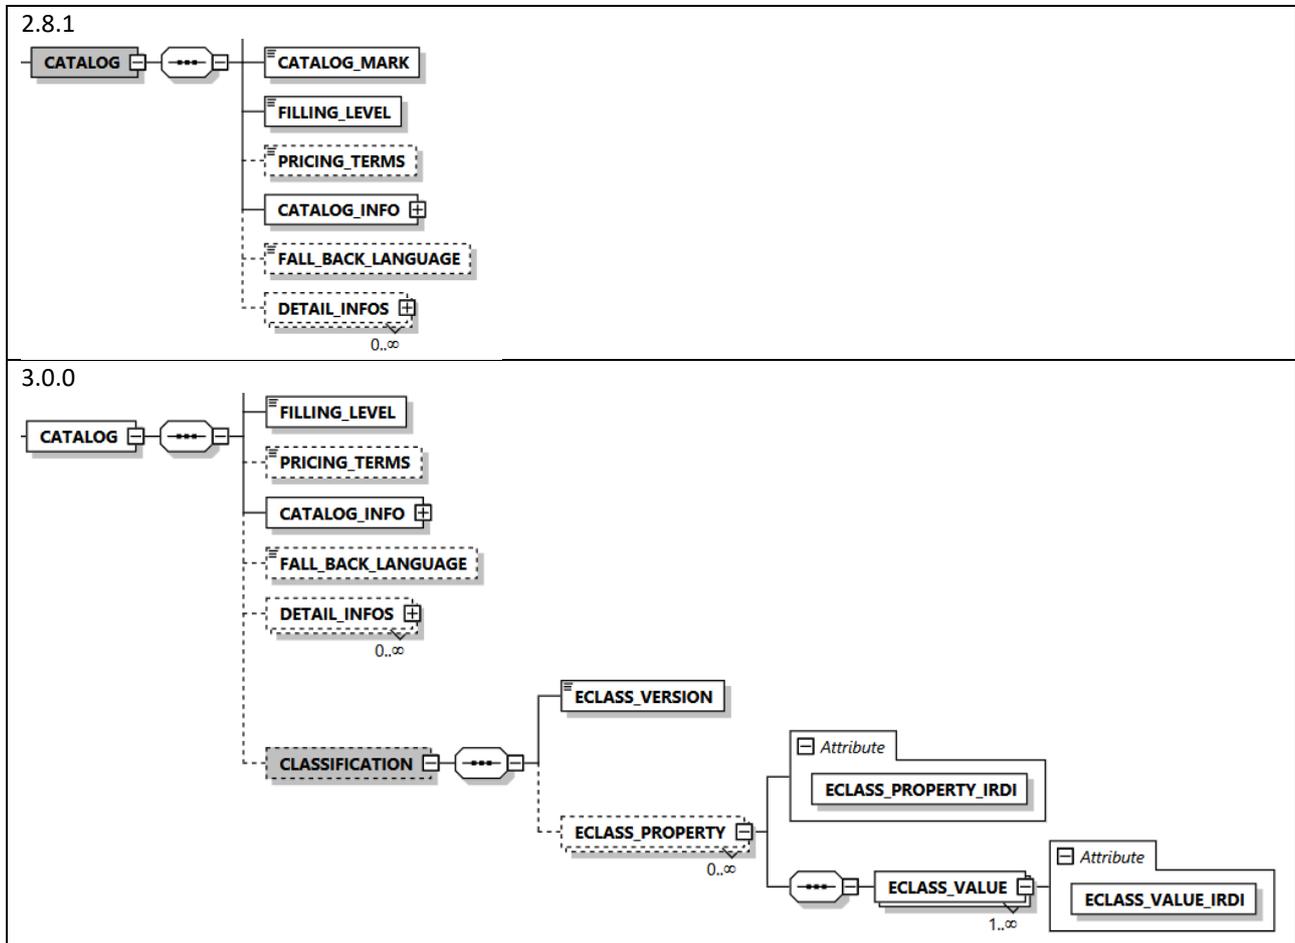

As the only classification scheme in the future, ECLASS will be maintained at various nodes in the IDM format. At the catalogue level, the ECLASS version valid for the entire catalogue is stored, as well as ECLASS properties that apply to all items in the catalogue.

CLASSIFICATION:

The optional element CLASSIFICATION below CATALOG is a complexType.

Description in the documentation:

This element is used to store the classification information at catalog level.

If the catalog contains only one classification, the ECLASS_VERSION must be specified.

Information at lower levels for the same properties overwrites the value specified at catalog level.

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



ECLASS_VERSION:

The element ECLASS_VERSION below CLASSIFICATION is of type integer and mandatory.

Description in the documentation:

The classification version is stored in this element.

Only the major no. of the version is specified.

ECLASS_PROPERTY:

The optional element ECLASS_PROPERTY below CLASSIFICATION is a complexType and can be created as often as desired.

Description in the documentation:

In this element the ECLASS properties are stored on catalog level.

Specifications at lower levels for the same properties overwrite the value specified at catalog level.

ECLASS_PROPERTY_IRDI:

The attribute ECLASS_PROPERTY_IRDI at the ECLASS_PROPERTY is of type string and mandatory. The pattern restricts to the IRDI values possible for characteristics.

Description in the documentation:

The attribute identifies the ECLASS property via the IRDI.

ECLASS_VALUE:

The element ECLASS_VALUE below ECLASS_PROPERTY is a complexType, mandatory and can be created multiple times for MultipleChoice characteristics.

Description in the documentation:

The values of the ECLASS property are stored in this element.

ECLASS_VALUE_IRDI:

The attribute ECLASS_VALUE_IRDI on ECLASS_VALUE is of type string and mandatory. The pattern restricts to the IRDI values possible for characteristic values.

Description in the documentation:

The attribute identifies the value of the ECLASS property via the IRDI.




```
<xs:element name="CLASSIFICATION" minOccurs="0">
  <xs:annotation>...</xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="ECLASS_VERSION">
        <xs:annotation>...</xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:integer">
            <xs:pattern value=""/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="ECLASS_PROPERTY" minOccurs="0" maxOccurs="unbounded">
        <xs:annotation>...</xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="ECLASS_VALUE" maxOccurs="unbounded">
              <xs:annotation>...</xs:annotation>
              <xs:complexType>
                <xs:attribute name="ECLASS_VALUE_IRDI" use="required">
                  <xs:annotation>...</xs:annotation>
                  <xs:simpleType>
                    <xs:restriction base="xs:string">
                      <xs:pattern value="0173-1#07-[A-Z]{3}[0-9]{3}#[0-9]{39}"/>
                    </xs:restriction>
                  </xs:simpleType>
                </xs:attribute>
              </xs:complexType>
            </xs:element>
          </xs:sequence>
          <xs:attribute name="ECLASS_PROPERTY_IRDI" use="required">
            <xs:annotation>...</xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:pattern value="0173-1#02-[A-Z]{3}[0-9]{3}#[0-9]{3}"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:attribute>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.

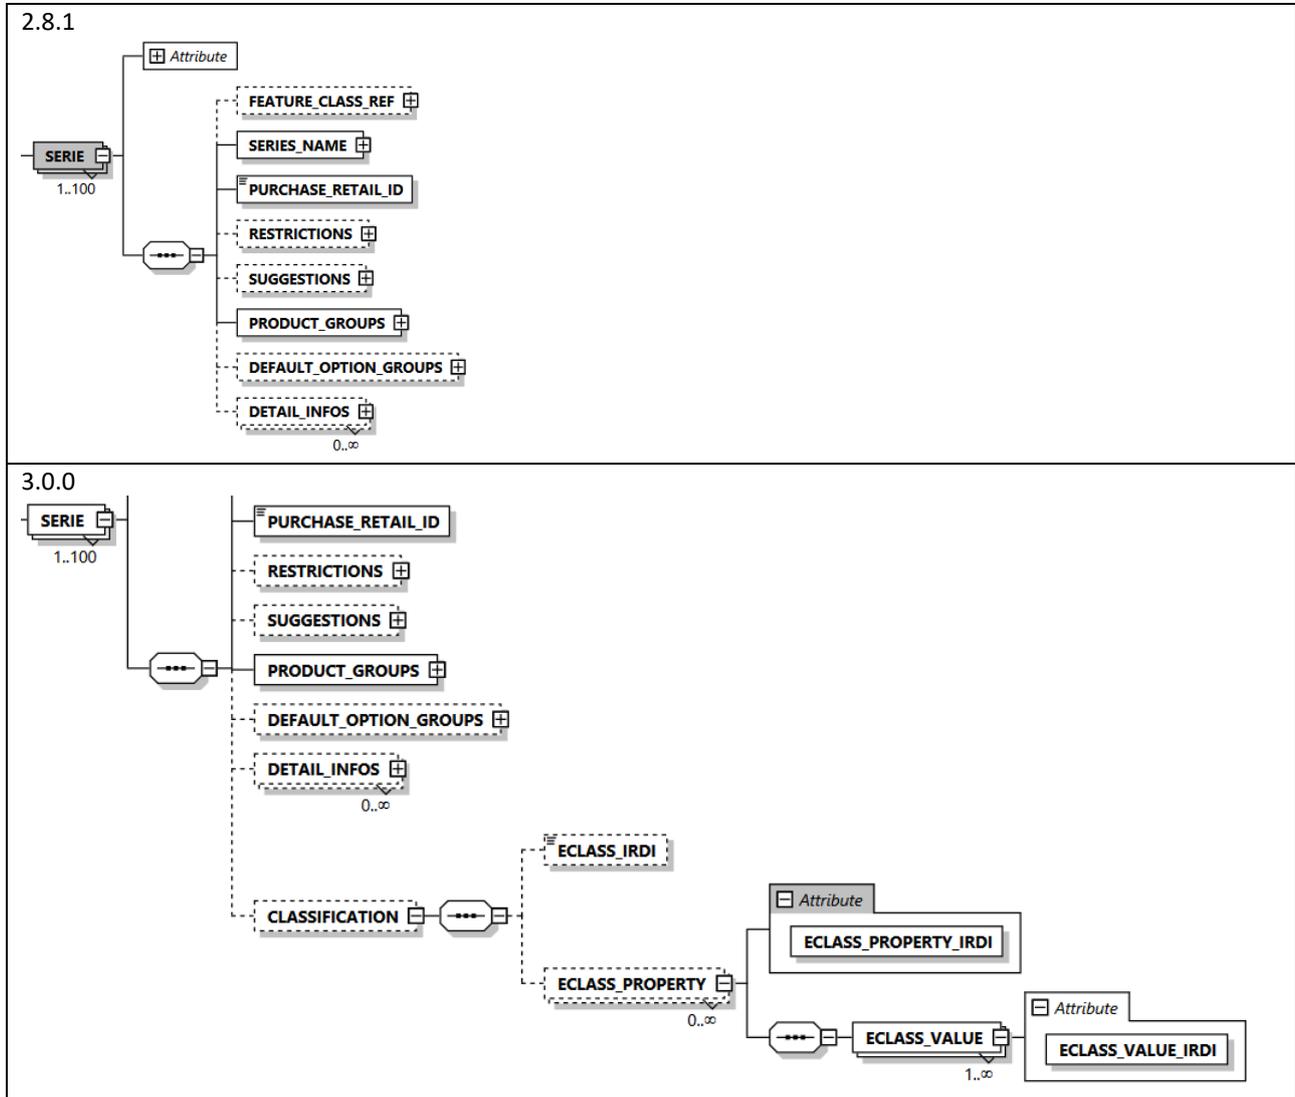

As the only classification scheme in the future, ECLASS is maintained at various nodes in the IDM format. The ECLASS class and any number of ECLASS properties, which apply to all items in the series, are stored on the series.

CLASSIFICATION:

The optional element CLASSIFICATION below SERIES is a complexType.

Description in the documentation:

This element can be used to store classification information at series level.

Specifications at lower levels for the class or the same properties overwrites the value specified at series level.

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



ECLASS_IRDI:

The optional element ECLASS_IRDI below CLASSIFICATION is of type string and optional. The pattern restricts to the IRDI values possible for classes.

Description in the documentation:

This element stores the IRDI of the 4th level of the hierarchical ECLASS class structure.

ECLASS_PROPERTY:

The optional element ECLASS_PROPERTY below CLASSIFICATION is a complexType and can be created as often as desired.

Description in the documentation:

In this element the ECLASS properties are stored on series level.

ECLASS_PROPERTY_IRDI:

The attribute ECLASS_PROPERTY_IRDI at the ECLASS_PROPERTY is of type string and mandatory. The pattern restricts to the IRDI values possible for characteristics.

Description in the documentation:

The attribute identifies the ECLASS property via the IRDI.

ECLASS_VALUE:

The element ECLASS_VALUE below ECLASS_PROPERTY is a complexType, mandatory and can be created multiple times for MultipleChoice characteristics.

Description in the documentation:

The values of the ECLASS property are stored in this element.

ECLASS_VALUE_IRDI:

The attribute ECLASS_VALUE_IRDI on ECLASS_VALUE is of type string and mandatory. The pattern restricts to the IRDI values possible for characteristic values.

Description in the documentation:

The attribute identifies the value of the ECLASS property via the IRDI.




```
<xs:element name="CLASSIFICATION" minOccurs="0">
  <xs:annotation>[...]</xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="ECLASS_IRDI" minOccurs="0">
        <xs:annotation>[...]</xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:pattern value="0173-1#01-[A-Z]{3}[0-9]{3}#[0-9]{3}"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="ECLASS_PROPERTY" minOccurs="0" maxOccurs="unbounded">
        <xs:annotation>[...]</xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="ECLASS_VALUE" maxOccurs="unbounded">
              <xs:annotation>[...]</xs:annotation>
              <xs:complexType>
                <xs:attribute name="ECLASS_VALUE_IRDI" use="required">
                  <xs:annotation>[...]</xs:annotation>
                  <xs:simpleType>
                    <xs:restriction base="xs:string">
                      <xs:pattern value="0173-1#07-[A-Z]{3}[0-9]{3}#[0-9]{39}"/>
                    </xs:restriction>
                  </xs:simpleType>
                </xs:attribute>
              </xs:complexType>
            </xs:element>
          </xs:sequence>
          <xs:attribute name="ECLASS_PROPERTY_IRDI" use="required">
            <xs:annotation>[...]</xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:pattern value="0173-1#02-[A-Z]{3}[0-9]{3}#[0-9]{3}"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:attribute>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.

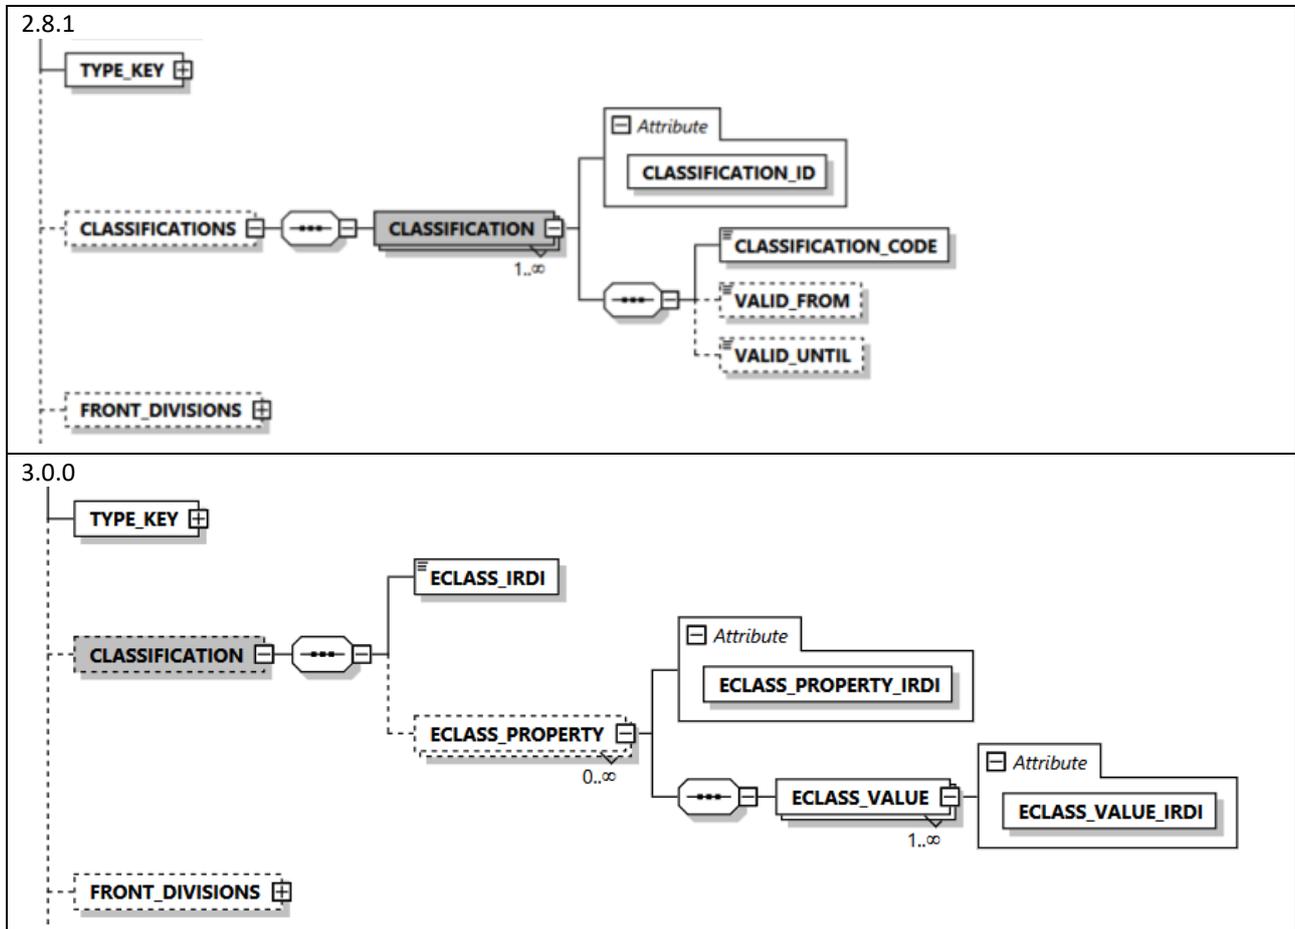

As the only classification scheme in the future, ECLASS will be maintained at various nodes in IDM format. The ECLASS class and any number of ECLASS properties are stored on the item.

CLASSIFICATION:

The optional element CLASSIFICATION below ITEM is a complexType.

Description in the documentation:

In this element, the classification information is stored at item level.

Information at lower levels for the same properties overwrites the value specified at item level.

ECLASS_IRDI:

The optional element ECLASS_IRDI below CLASSIFICATION is of type string and optional. The pattern restricts to the IRDI values possible for classes.

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



Description in the documentation:

This element stores the IRDI of the 4th level of the hierarchical ECLASS class structure.

ECLASS_PROPERTY:

The optional element ECLASS_PROPERTY below CLASSIFICATION is a complexType and can be created as often as desired.

Description in the documentation:

In this element the ECLASS properties are stored on item level.

ECLASS_PROPERTY_IRDI:

The attribute ECLASS_PROPERTY_IRDI at the ECLASS_PROPERTY is of type string and mandatory. The pattern restricts to the IRDI values possible for characteristics.

Description in the documentation:

The attribute identifies the ECLASS property via the IRDI.

ECLASS_VALUE:

The element ECLASS_VALUE below ECLASS_PROPERTY is a complexType, mandatory and can be created multiple times for MultipleChoice characteristics.

Description in the documentation:

The values of the ECLASS property are stored in this element.

ECLASS_VALUE_IRDI:

The attribute ECLASS_VALUE_IRDI on ECLASS_VALUE is of type string and mandatory. The pattern restricts to the IRDI values possible for characteristic values.

Description in the documentation:

The attribute identifies the value of the ECLASS property via the IRDI.



```
<xs:element name="CLASSIFICATION" minOccurs="0">
  <xs:annotation>[...]</xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="ECLASS_IRDI">
        <xs:annotation>[...]</xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:pattern value="0173-1#01-[A-Z]{3}[0-9]{3}#[0-9]{3}"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="ECLASS_PROPERTY" minOccurs="0" maxOccurs="unbounded">
        <xs:annotation>[...]</xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="ECLASS_VALUE" maxOccurs="unbounded">
              <xs:annotation>[...]</xs:annotation>
              <xs:complexType>
                <xs:attribute name="ECLASS_VALUE_IRDI" use="required">
                  <xs:annotation>[...]</xs:annotation>
                  <xs:simpleType>
                    <xs:restriction base="xs:string">
                      <xs:pattern value="0173-1#07-[A-Z]{3}[0-9]{3}#[0-9]{39}"/>
                    </xs:restriction>
                  </xs:simpleType>
                </xs:attribute>
              </xs:complexType>
            </xs:element>
          </xs:sequence>
          <xs:attribute name="ECLASS_PROPERTY_IRDI" use="required">
            <xs:annotation>[...]</xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:pattern value="0173-1#02-[A-Z]{3}[0-9]{3}#[0-9]{3}"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:attribute>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

A = Added = Adding new elements or attributes


C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



6.5. A New optional complex type ECLASS_PROPERTY under FEATURE Decision : 2022-11-17

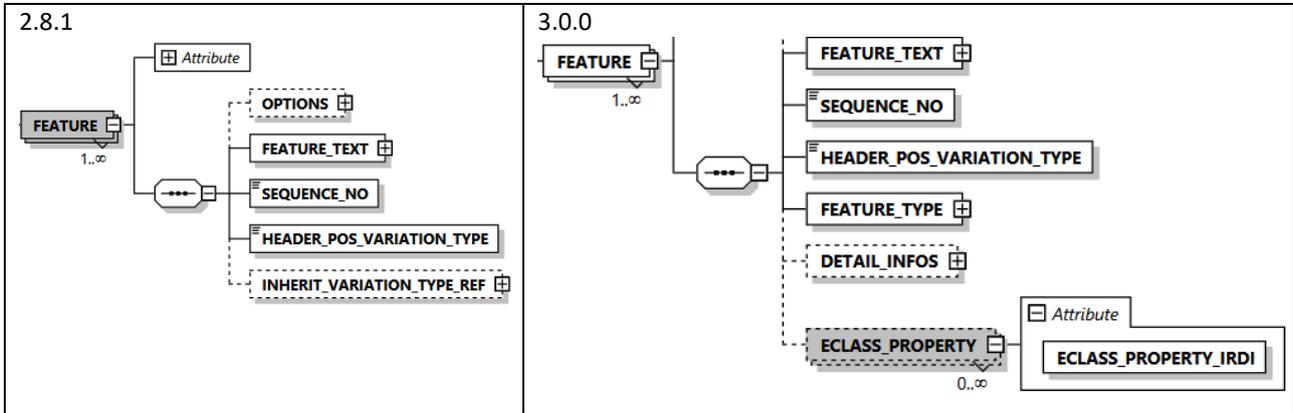

As the only classification scheme in the future, ECLASS is maintained at various nodes in IDM format. Any number of ECLASS features are stored at the feature.

ECLASS_PROPERTY:

The optional element ECLASS_PROPERTY below FEATURE is a complexType and can be created as often as desired.

Description in the documentation:

In this element the ECLASS properties are stored at the feature.

ECLASS_PROPERTY_IRDI:

The attribute ECLASS_PROPERTY_IRDI at the ECLASS_PROPERTY is of type string and mandatory. The pattern restricts to the IRDI values possible for characteristics.

Description in the documentation:

The attribute identifies the ECLASS property via the IRDI.


```
<xs:element name="ECLASS_PROPERTY" minOccurs="0" maxOccurs="unbounded">
  <xs:annotation>...</xs:annotation>
  <xs:complexType>
    <xs:attribute name="ECLASS_PROPERTY_IRDI" use="required">
      <xs:annotation>...</xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:string">
          <xs:pattern value="0173-1#02-[A-Z]{3}[0-9]{3}#[0-9]{3}"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:attribute>
  </xs:complexType>
</xs:element>
```

- A = Added = Adding new elements or attributes
- C = Changed = Changes to existing elements, attributes or descriptive texts.
- R = Removed = Deletion of elements or attributes
- F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



6.6. A New optional choice between ECLASS_PROPERTY and ECLASS_VALUE under OPTION

Decision : 2022-11-17

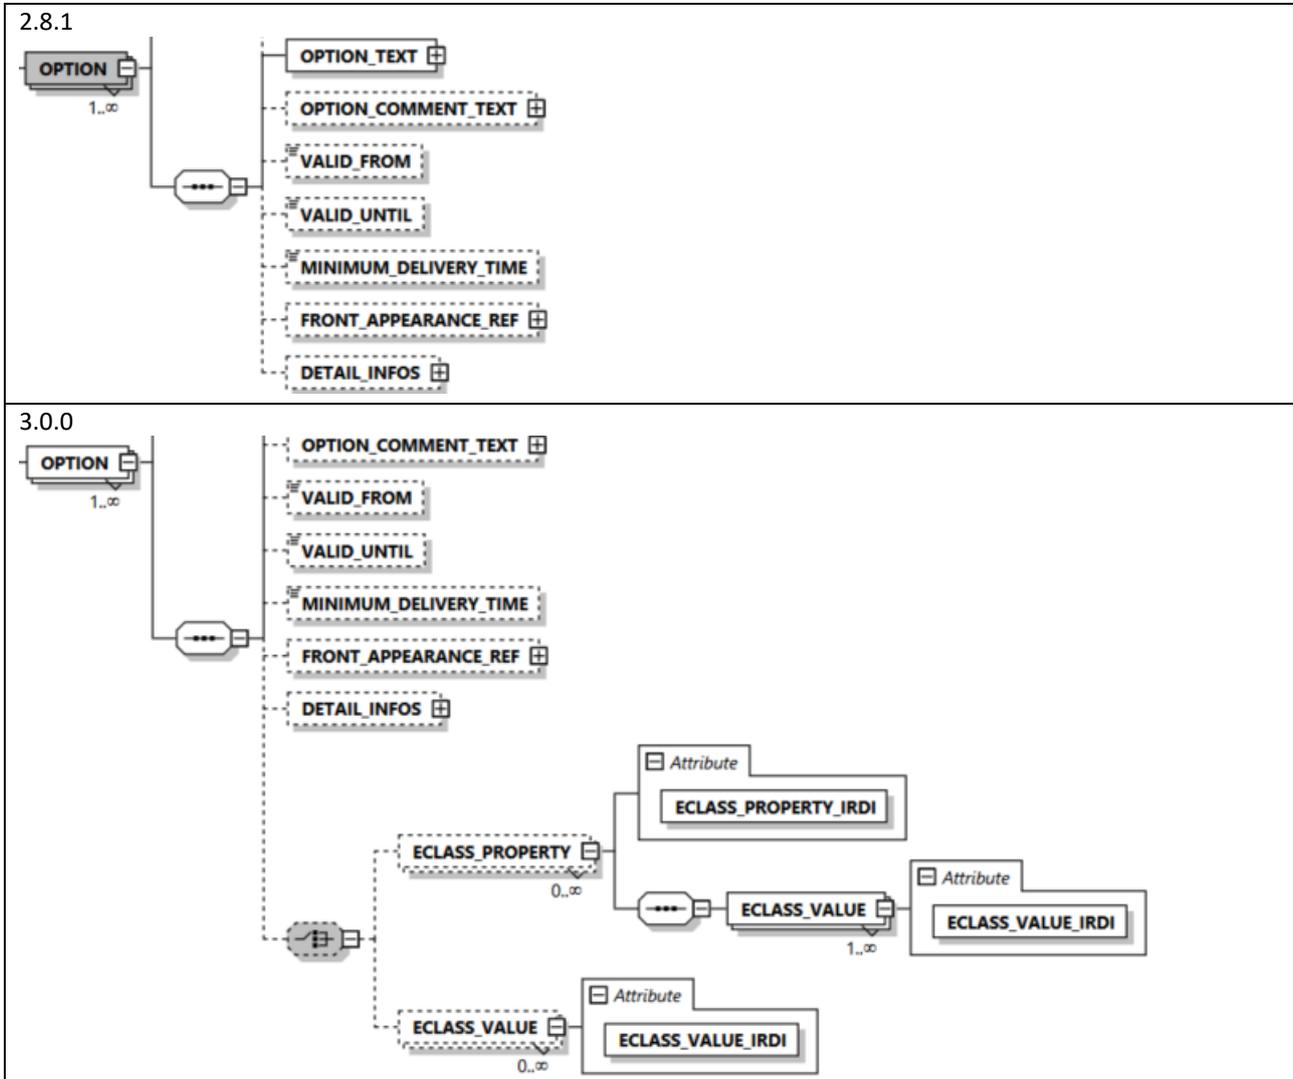

As the only classification scheme in the future, ECLASS is maintained at various nodes in IDM format. Any number of ECLASS properties and ECLASS property values can be stored at the option.

ECLASS_PROPERTY:

The optional element ECLASS_PROPERTY under the Choice below OPTION is a complexType and can be created as often as desired.

Description in the documentation:

In this element the ECLASS properties are stored at the option.

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



ECLASS_PROPERTY_IRDI:

The attribute ECLASS_PROPERTY_IRDI at the ECLASS_PROPERTY is of type string and mandatory. The pattern restricts to the IRDI values possible for characteristics.

Description in the documentation:

The attribute identifies the ECLASS property via the IRDI.

ECLASS_VALUE:

The element ECLASS_VALUE below ECLASS_PROPERTY is a complexType, mandatory and can be created multiple times for MultipleChoice characteristics.

Description in the documentation:

The values of the ECLASS property are stored in this element.

ECLASS_VALUE_IRDI:

The attribute ECLASS_VALUE_IRDI at ECLASS_VALUE below ECLASS_PROPERTY is of type string and mandatory. The pattern restricts to the IRDI values possible for characteristic values.

Description in the documentation:

The attribute identifies the value of the ECLASS property via the IRDI.

ECLASS_VALUE:

The optional element ECLASS_VALUE under the Choice below OPTION is a complexType and can be created as often as desired.

Description in the documentation:

The values of an ECLASS property are stored in this element.

ECLASS_VALUE_IRDI:

The attribute ECLASS_VALUE_IRDI at ECLASS_VALUE below OPTION is of type string and mandatory. The pattern restricts to the IRDI values possible for characteristic values.

Description in the documentation:

The attribute identifies the value of an ECLASS property via the IRDI.



```
<xs:choice minOccurs="0">
  <xs:element name="ECLASS_PROPERTY" minOccurs="0" maxOccurs="unbounded">
    <xs:annotation>...</xs:annotation>
    <xs:complexType>
      <xs:sequence>
        <xs:element name="ECLASS_VALUE" maxOccurs="unbounded">
          <xs:annotation>...</xs:annotation>
          <xs:complexType>
            <xs:attribute name="ECLASS_VALUE_IRDI" use="required">
              <xs:annotation>...</xs:annotation>
              <xs:simpleType>
                <xs:restriction base="xs:string">
                  <xs:pattern value="0173-1#07-[A-Z]{3}[0-9]{3}#[0-9]{39}"/>
                </xs:restriction>
              </xs:simpleType>
            </xs:attribute>
          </xs:complexType>
        </xs:element>
      </xs:sequence>
      <xs:attribute name="ECLASS_PROPERTY_IRDI" use="required">
        <xs:annotation>...</xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:pattern value="0173-1#02-[A-Z]{3}[0-9]{3}#[0-9]{3}"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:attribute>
    </xs:complexType>
  </xs:element>
  <xs:element name="ECLASS_VALUE" minOccurs="0" maxOccurs="unbounded">
    <xs:annotation>...</xs:annotation>
    <xs:complexType>
      <xs:attribute name="ECLASS_VALUE_IRDI" use="required">
        <xs:annotation>...</xs:annotation>
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:pattern value="0173-1#07-[A-Z]{3}[0-9]{3}#[0-9]{39}"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:attribute>
    </xs:complexType>
  </xs:element>
</xs:choice>
```

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



7. Regular expression for key elements

7.1. C Changed pattern in the TYPE_NO element under ITEM

Decision : 2022-03-22

2.8.1

```
<xs:element name="ITEM" maxOccurs="unbounded">
  <xs:annotation>...</xs:annotation>
  <xs:complexType>
    <xs:sequence>...</xs:sequence>
    <xs:attribute name="SERIE_NO" use="required">...</xs:attribute>
    <xs:attribute name="TYPE_NO" use="required">
      <xs:annotation>...</xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:string">
          <xs:minLength value="1"/>
          <xs:maxLength value="15"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:attribute>
  </xs:complexType>
</xs:element>
```

3.0.0

```
<xs:element name="ITEM" maxOccurs="unbounded">
  <xs:annotation>...</xs:annotation>
  <xs:complexType>
    <xs:sequence>...</xs:sequence>
    <xs:attribute name="SERIE_NO" use="required">...</xs:attribute>
    <xs:attribute name="TYPE_NO" use="required">
      <xs:annotation>...</xs:annotation>
      <xs:simpleType>
        <xs:restriction base="xs:string">
          <xs:minLength value="1"/>
          <xs:maxLength value="15"/>
          <xs:pattern value="\S{0,28}\S?" />
        </xs:restriction>
      </xs:simpleType>
    </xs:attribute>
  </xs:complexType>
</xs:element>
```

To minimise erroneous type numbers, the new pattern in the TYPE_NO element under ITEM excludes spaces at the beginning and end.

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



7.2. C Changed pattern in the TYPE_NO element below
OPTIONAL_ITEMS

Decision : 2022-03-22

2.8.1

```
<xs:element name="OPTIONAL_ITEM_GROUP" maxOccurs="9">
  <xs:annotation>...</xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="GROUP_TITLE_REF" minOccurs="0">...</xs:element>
      <xs:element name="ITEM_REF" maxOccurs="unbounded">
        <xs:annotation>...</xs:annotation>
        <xs:complexType>
          <xs:attribute name="SERIE_NO" use="required">...</xs:attribute>
          <xs:attribute name="TYPE_NO" use="required">
            <xs:annotation>...</xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:minLength value="1"/>
                <xs:maxLength value="15"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:attribute>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

3.0.0

```
<xs:element name="OPTIONAL_ITEM_GROUP" maxOccurs="9">
  <xs:annotation>...</xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="GROUP_TITLE_REF" minOccurs="0">...</xs:element>
      <xs:element name="ITEM_REF" maxOccurs="unbounded">
        <xs:annotation>...</xs:annotation>
        <xs:complexType>
          <xs:attribute name="SERIE_NO" use="required">...</xs:attribute>
          <xs:attribute name="TYPE_NO" use="required">
            <xs:annotation>...</xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:minLength value="1"/>
                <xs:maxLength value="15"/>
                <xs:pattern value="\S(.{0,28}\S)?"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:attribute>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

To minimise erroneous type numbers, the new pattern in the TYPE_NO element below OPTIONAL_ITEMS excludes spaces at the beginning and end.

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



7.3. C Changed pattern in the TYPE_NO element below
MANDATORY_ITEMS

Decision : 2022-03-22

2.8.1

```
<xs:element name="MANDATORY_ITEM_GROUP" maxOccurs="9">
  <xs:annotation>...</xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="GROUP_TITLE_REF" minOccurs="0">...</xs:element>
      <xs:element name="ITEM_REF" maxOccurs="unbounded">
        <xs:annotation>...</xs:annotation>
        <xs:complexType>
          <xs:attribute name="SERIE_NO" use="required">...</xs:attribute>
          <xs:attribute name="TYPE_NO" use="required">
            <xs:annotation>...</xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:minLength value="1"/>
                <xs:maxLength value="15"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:attribute>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

3.0.0

```
<xs:element name="MANDATORY_ITEM_GROUP" maxOccurs="9">
  <xs:annotation>...</xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="GROUP_TITLE_REF" minOccurs="0">...</xs:element>
      <xs:element name="ITEM_REF" maxOccurs="unbounded">
        <xs:annotation>...</xs:annotation>
        <xs:complexType>
          <xs:attribute name="SERIE_NO" use="required">...</xs:attribute>
          <xs:attribute name="TYPE_NO" use="required">
            <xs:annotation>...</xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:minLength value="1"/>
                <xs:maxLength value="15"/>
                <xs:pattern value="\S(?:\S)?"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:attribute>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

To minimise erroneous type numbers, the new pattern in the TYPE_NO element below MANDATORY_ITEMS excludes spaces at the beginning and end.

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



7.4. C Changed pattern in the TYPE_NO element below
OPERATION_ITEM

Decision : 2022-03-22

2.8.1

```

<xs:element name="OPERATION_ITEM" minOccurs="0">
  <xs:annotation>[...]</xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="SCOPE" maxOccurs="5">
        <xs:annotation>[...]</xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="ITEM_INFORMATION" maxOccurs="unbounded">
              <xs:annotation>[...]</xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="CLASS">[...]</xs:element>
                  <xs:element name="ITEM_REF" minOccurs="0">
                    <xs:annotation>[...]</xs:annotation>
                    <xs:complexType>
                      <xs:attribute name="SERIE_NO" use="required">[...]</xs:attribute>
                      <xs:attribute name="TYPE_NO" use="required">
                        <xs:annotation>[...]</xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:minLength value="1"/>
                            <xs:maxLength value="15"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:attribute>
                    </xs:complexType>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

3.0.0

```

<xs:element name="OPERATION_ITEM" minOccurs="0">
  <xs:annotation>[...]</xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="SCOPE" maxOccurs="5">
        <xs:annotation>[...]</xs:annotation>
        <xs:complexType>
          <xs:sequence>
            <xs:element name="ITEM_INFORMATION" maxOccurs="unbounded">
              <xs:annotation>[...]</xs:annotation>
              <xs:complexType>
                <xs:sequence>
                  <xs:element name="CLASS">[...]</xs:element>
                  <xs:element name="ITEM_REF" minOccurs="0">
                    <xs:annotation>[...]</xs:annotation>
                    <xs:complexType>
                      <xs:attribute name="SERIE_NO" use="required">[...]</xs:attribute>
                      <xs:attribute name="TYPE_NO" use="required">
                        <xs:annotation>[...]</xs:annotation>
                        <xs:simpleType>
                          <xs:restriction base="xs:string">
                            <xs:minLength value="1"/>
                            <xs:maxLength value="15"/>
                            <xs:pattern value="\S(?:\{0,28\}\S)?"/>
                          </xs:restriction>
                        </xs:simpleType>
                      </xs:attribute>
                    </xs:complexType>
                  </xs:element>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

To minimise erroneous type numbers, the new pattern in the TYPE_NO element below OPERATION_ITEM excludes spaces at the beginning and end.

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



7.5. C Changed pattern in element SUBCONTRACTOR_ITEM_NO

Decision : 2022-06-28

2.8.1

```
<xs:element name="SUBCONTRACTOR_ITEM_NO" minOccurs="0">
  <xs:annotation>...</xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="15"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

3.0.0

```
<xs:element name="SUBCONTRACTOR_ITEM_NO" minOccurs="0">
  <xs:annotation>...</xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="25"/>
      <xs:pattern value="\S(.{0,28}\S)?"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

To minimise erroneous type numbers, the new pattern in the SUBCONTRACTOR_ITEM_NO element excludes spaces at the beginning and end.

7.6. C Changed pattern in the element OLD_TYPE_NO

Decision : 2022-06-28

2.8.1

```
<xs:element name="OLD_TYPE_NO" minOccurs="0">
  <xs:annotation>...</xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="15"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

3.0.0

```
<xs:element name="OLD_TYPE_NO" minOccurs="0">
  <xs:annotation>...</xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="15"/>
      <xs:pattern value="\S(.{0,28}\S)?"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

To minimise erroneous type numbers, the new pattern in the OLD_TYPE_NO element excludes spaces at the beginning and end.

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



7.7. C Changed pattern in the TYPE_NO element below BLOCK_PARTS Decision : 2022-03-22

2.8.1

```
<xs:element name="BLOCK_PART" maxOccurs="unbounded">
  <xs:annotation>...</xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="BLOCK_SEQUENTIAL_NO">...</xs:element>
      <xs:element name="ITEM_REF">
        <xs:annotation>...</xs:annotation>
        <xs:complexType>
          <xs:attribute name="TYPE_NO" use="required">
            <xs:annotation>...</xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:minLength value="1"/>
                <xs:maxLength value="15"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:attribute>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

3.0.0

```
<xs:element name="BLOCK_PART" maxOccurs="unbounded">
  <xs:annotation>...</xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="BLOCK_SEQUENTIAL_NO">...</xs:element>
      <xs:element name="ITEM_REF">
        <xs:annotation>...</xs:annotation>
        <xs:complexType>
          <xs:attribute name="TYPE_NO" use="required">
            <xs:annotation>...</xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:minLength value="1"/>
                <xs:maxLength value="15"/>
                <xs:pattern value="\S(.{0,28}\S)?"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:attribute>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

To minimise erroneous type numbers, the new pattern in the TYPE_NO element below BLOCK_PARTS excludes spaces at the beginning and end.

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



7.8. C Changed pattern in the TYPE_NO element below
MODULE_PARTS

Decision : 2022-03-22

2.8.1

```
<xs:element name="MODULE_PART" maxOccurs="unbounded">
  <xs:annotation>...</xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="PART_SEQUENTIAL_NO">...</xs:element>
      <xs:element name="ITEM_REF">
        <xs:annotation>...</xs:annotation>
        <xs:complexType>
          <xs:attribute name="TYPE_NO" use="required">
            <xs:annotation>...</xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:minLength value="1"/>
                <xs:maxLength value="15"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:attribute>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

3.0.0

```
<xs:element name="MODULE_PART" maxOccurs="unbounded">
  <xs:annotation>...</xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="PART_SEQUENTIAL_NO">...</xs:element>
      <xs:element name="ITEM_REF">
        <xs:annotation>...</xs:annotation>
        <xs:complexType>
          <xs:attribute name="TYPE_NO" use="required">
            <xs:annotation>...</xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:minLength value="1"/>
                <xs:maxLength value="15"/>
                <xs:pattern value="\S(.{0,28}\S)?"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:attribute>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

To minimise erroneous type numbers, the new pattern in the TYPE_NO element below MODULE_PARTS excludes spaces at the beginning and end.

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



2.8.1

```
<xs:element name="INTERNAL_ORDER_NO" minOccurs="0">
  <xs:annotation> ... </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="15"/>
      <xs:pattern value=""/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

3.0.0

```
<xs:element name="INTERNAL_ORDER_NO" minOccurs="0">
  <xs:annotation> ... </xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:string">
      <xs:minLength value="1"/>
      <xs:maxLength value="15"/>
      <xs:pattern value="\S(?:\S{0,28})?"/>
    </xs:restriction>
  </xs:simpleType>
</xs:element>
```

To minimise erroneous type numbers, the new pattern in the INTERNAL_ORDER_NO element excludes spaces at the beginning and end.



7.10. C Changed pattern in the TYPE_NO element below
BLOCK_CONDITION

Decision : 2022-03-22

2.8.1

```
<xs:element name="BLOCK_CONDITION" maxOccurs="unbounded">
  <xs:annotation>...</xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="ITEM_REF">
        <xs:annotation>...</xs:annotation>
        <xs:complexType>
          <xs:attribute name="TYPE_NO" use="required">
            <xs:annotation>...</xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:minLength value="1"/>
                <xs:maxLength value="15"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:attribute>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

3.0.0

```
<xs:element name="BLOCK_CONDITION" maxOccurs="unbounded">
  <xs:annotation>...</xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="ITEM_REF">
        <xs:annotation>...</xs:annotation>
        <xs:complexType>
          <xs:attribute name="TYPE_NO" use="required">
            <xs:annotation>...</xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:minLength value="1"/>
                <xs:maxLength value="15"/>
                <xs:pattern value="\S(.\{0,28\}\S)?"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:attribute>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

To minimise erroneous type numbers, the new pattern in the TYPE_NO element below BLOCK_CONDITION excludes spaces at the beginning and end.

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



711. C Changed pattern in the TYPE_NO element below
BLOCK_SALE_PRICE

Decision : 2022-03-22

2.8.1

```
<xs:element name="BLOCK_SALE_PRICE" maxOccurs="unbounded">
  <xs:annotation>...</xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="ITEM_REF">
        <xs:annotation>...</xs:annotation>
        <xs:complexType>
          <xs:attribute name="TYPE_NO" use="required">
            <xs:annotation>...</xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:minLength value="1"/>
                <xs:maxLength value="15"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:attribute>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

3.0.0

```
<xs:element name="BLOCK_SALE_PRICE" maxOccurs="unbounded">
  <xs:annotation>...</xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="ITEM_REF">
        <xs:annotation>...</xs:annotation>
        <xs:complexType>
          <xs:attribute name="TYPE_NO" use="required">
            <xs:annotation>...</xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:minLength value="1"/>
                <xs:maxLength value="15"/>
                <xs:pattern value="\S(.{0,28}\S)?"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:attribute>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

To minimise erroneous type numbers, the new pattern in the TYPE_NO element below BLOCK_SALE_PRICE excludes spaces at the beginning and end.

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



7.12. C Changed pattern in the TYPE_NO element below
CREDIT_SURCHARGE_CLEARING

Decision : 2022-03-22

2.8.1

```
<xs:element name="CREDIT_SURCHARGE_CLEARING" maxOccurs="unbounded">
  <xs:annotation>...</xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="ITEM_REF">
        <xs:annotation>...</xs:annotation>
        <xs:complexType>
          <xs:attribute name="TYPE_NO" use="required">
            <xs:annotation>...</xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:minLength value="1"/>
                <xs:maxLength value="15"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:attribute>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

3.0.0

```
<xs:element name="CREDIT_SURCHARGE_CLEARING" maxOccurs="unbounded">
  <xs:annotation>...</xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="ITEM_REF">
        <xs:annotation>...</xs:annotation>
        <xs:complexType>
          <xs:attribute name="TYPE_NO" use="required">
            <xs:annotation>...</xs:annotation>
            <xs:simpleType>
              <xs:restriction base="xs:string">
                <xs:minLength value="1"/>
                <xs:maxLength value="15"/>
                <xs:pattern value="\S(.{0,28}\S)?"/>
              </xs:restriction>
            </xs:simpleType>
          </xs:attribute>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

To minimise erroneous type numbers, the new pattern in the TYPE_NO element below
CREDIT_SURCHARGE_CLEARING excludes spaces at the beginning and end.

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



8. New assignment areas

8.1. C New values in the attribute SCOPE_NO

Decision : 2022-06-28

2.8.1

```
<xs:attribute name="SCOPE_NO" use="required">
  <xs:annotation>...</xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:positiveInteger">
      <xs:minInclusive value="1"/>
      <xs:maxInclusive value="5"/>
    </xs:restriction>
  </xs:simpleType>
</xs:attribute>
```

3.0.0

```
<xs:attribute name="SCOPE_NO" use="required">
  <xs:annotation>...</xs:annotation>
  <xs:simpleType>
    <xs:restriction base="xs:positiveInteger">
      <xs:minInclusive value="1"/>
      <xs:maxInclusive value="8"/>
    </xs:restriction>
  </xs:simpleType>
</xs:attribute>
```

For a better assignment, the values 6 (ceiling panel), 7 (cover plate) and 8 (cornice floor) have been added to the attribute SCOPE_NO.

Description in the documentation:

Here you define for which area the assignments are created.

The following assignment ranges are possible:

- 1 = Type
- 2 = plinth
- 3 = wreath bar
- 4 = Light strip
- 5 = Worktop
- 6 = Ceiling blind
- 7 = Cover plate
- 8 = Cornice plate

For example, the assignment range 1 (Type) means that something is assigned to the target type as such, but not that a type is assigned to the target type.

If the values 1, 5, 7 or 8 are entered in this element, the elements BASIC_SHAPE_REFERENCE and COVER must not be filled. If the values 2, 3, 4 or 6 are entered, the elements BASIC_SHAPE_REFERENCE and COVER must be filled according to the regulations for this elements.

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



9. Textual changes in the documentation

9.1. C Extended descriptions of the variant types according to CSV documentation

Decision : 2022-03-22

2.8.1			
Variation type	Variation text	Option type	Remark
105	Front combination	K	If only one key is used for different front information.
201	Carcase combination	K	If only one key is used for several – interior /exterior - carcase colours.
303	Combination of handles	K	If only one key is defined for several handle conditions
999	Fixed material assignment	F	

3.0.0			
Variation type	Variation text	Option type	Remark
105	Front combination	K	If only one key is given for several front information. If variant type 105 is filled, it overrides variant types 100-104 to the extent that they are only for internal use by the software companies (e.g. internal colour control). These are then set as invisible header variants ("U") in the element HEADER_POS_VARIATION_TYPE. For external use as a selection for the user (e.g. query as header and order information), only the elements under EDI_INFO are used.
201	Carcase combination	K	If there is only one key for several carcase colours - inside/outside. If variant type 201 is filled, it overrides variant types 200, 202-205 to the extent that they are only for internal use by the software companies (e.g. internal colour control). These are then set as invisible header variants ("U") in the element HEADER_POS_VARIATION_TYPE. For external use as a selection for the user (e.g. query as header and order information), only the elements under EDI_INFO are used.
303	Combination of handles	K	If only one key is given for several handle conditions. If variant type 303 is filled, it overrides variant types 300-302 to the extent that they are only for internal use by the software companies (e.g. internal colour control). These are then set as invisible header variants ("U") in the element HEADER_POS_VARIATION_TYPE. For external use as a selection for the user (e.g. query as header and order information), only the elements under EDI_INFO are used.
999	Fixed material assignment	F	This variant type is defined globally, but may only be used in the material properties.

It was noticed that the descriptions of 4 variant types were only partially transferred during the transformation of the CSV into the XML documentation. Missing information has now been added again.

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



9.2. C Explanatory example for multi-language catalogues (e.g. Switzerland) on the elements COUNTRY_ID and ISO_LANGUAGE_ID

Decision : 2022-03-22

ISA_LANGUAGE_ID:

2.8.1

The language code defines the language in which the texts in the data pool were created. The ISO language code must be used.

Multiple language codes indicate that the catalogue is used in multiple languages. The catalogue texts must only use the language codes entered in these elements.

3.0.0

The language key defines the language in which the texts of the dataset were created. The ISO language key is to be used for this purpose.

In the case of multilingual catalogues, all languages occurring in the catalogue must be entered here. Only the language keys entered in these elements may be used for the texts of the catalogue.

For example, in a Swiss catalogue, the ISO_LANGUAGE_ID's DE (German), FR (French) and IT (Italian) can be stored here.

COUNTRY_ID:

2.8.1

This element is used to specify the correct country allocation where a language is spoken in multiple countries and the identical currency is specified. This requires entry of the ISO country code.

3.0.0

The ISO country code of the target market is entered in this element.

For countries with several languages but the same currency, make sure to use the correct ISO country code.

For example, a Swiss catalogue may contain the 3 ISO_LANGUAGE_ID's DE (German), FR (French) and IT (Italian). However, the COUNTRY_ID must be indicated as CH (Switzerland).

To avoid misleading information in the COUNTRY_ID and ISO_LANGUAGE_ID elements, an explanatory example has been added to the description of both elements.



9.3. C Changed description of the PRICE element below
ADDITIONAL_PRICE_GROUP

Decision : 2022-11-08

2.8.1

The prices are filled in according to the price groups of an item (price field). Prices have to be defined in the smallest currency unit (e.g. instead of 300,00 [€], 30000 [Cent]). Fields may also contain negative prices. These are entered with a minus sign, therefore the number of digits for negative prices is one less than for positive values. The first figure after the minus sign has to be > 0, blanks are not permitted.

(Example: field with 9 digits; the figure minus 9,00 € shall be filled in : -900)

3.0.0

Prices are entered in this field according to their price groups (price field). The prices must always be entered in the smallest currency unit (e.g. 300,00 € = 30000 Cent). Negative prices can also be entered in the field. They are displayed with a leading minus sign. The available number of digits for negative values is one less than for positive values. The first digit after the minus sign must not be 0. Blanks are not allowed.

(Example: 9-digit field. minus 9.00 € is to be displayed : -900)

If the attribute PERCENTAGE_SURCHARGE is assigned the value 1, the value created here applies as a percentage surcharge. The last two digits are also to be considered as decimal places.

Due to the new attributes under ADDITIONAL_PRICE_GROUP, which indicate the price as a percentage surcharge, the description in the PRICE element must be adjusted.

9.4. C Changed description of the element BASIC_SHAPE_REFERENCE
below SCOPE

Decision : 2022-06-28

2.8.1

If assignments for plinth, cornices, light pelmets (scope 2-4) are defined, the assignment to a basic shape has to be defined in this element. Settings in this field are required if values 2 - 4 are entered in the field SCOPE. If the values 1 and 5 are set, this element has to be left blank.

3.0.0

If assignments for plinth, wreath strip, light strip or ceiling panel (scope 2, 3, 4, 6) are defined, the assignment to a basic shape has to be defined in this element. Settings in this field are required if values 2, 3, 4 or 6 are entered in the field SCOPE. If the values 1, 5, 7, or 8 are set, this element has to be left blank.

Due to the added values in the element SCOPE, the description in the element BASIC_SHAPE_REFERENCE has to be adapted.

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



2.8.1

This element provides information about possible alterations of an item provided by the manufacturer. Any changes of an item depend on the definitions of the basic shape in the element PARAMETERS (path 1).

0 = all measurement parameters (PARAMETERS (path 1)) are locked, changes of measurements are not possible;

1 = the measurement parameters (PARAMETERS (path 1)) may be changed according to the settings in SA500. The measurement that shall be changed is upon request;

2 = all measurement parameters (PARAMETERS (path 1)) may be changed, locked parameters require identical values in the attribute NOMINAL_VALUE (path 1), FROM (path 1) and TO (path 1).

Path 1:

SERIES/SERIE/PRODUCT_GROUPS/PRODUCT_GROUP/ITEMS/ITEM/BASIC_PROFILE/CARCASE_BASIC_SHAPE/BASIC_SHAPE_PARAMETERS/BASIC_SHAPE_PARAMETER

3.0.0

This element controls the factory modification options of an item. The change options of the articles depend on the definition of its basic shape parameters in the PARAMETERS element (path 1).

0 = all dimension parameters (PARAMETERS (path 1)) are locked, a dimension change is not possible. **The attributes BASIC_SHAPE_FROM and BASIC_SHAPE_TO must not be specified.**

1 = indicates a general dimensional variability of the item; the dimensional parameters (PARAMETERS (path 1)) of the variable axis must be specified; locked (non-variable) parameters must have identical values in the attributes BASIC_SHAPE_NOMINAL_VALUE, BASIC_SHAPE_FROM and BASIC_SHAPE_TO.

2 = indicates a dimensional variability in a special case, the dimensional parameters (PARAMETERS (path 1)) of the variable axis can be specified; if the parameters BASIC_SHAPE_FROM and BASIC_SHAPE_TO are not filled, the possible dimensional changes must be agreed with the supplier; locked (non-variable) parameters must have identical values in the attributes BASIC_SHAPE_NOMINAL_VALUE, BASIC_SHAPE_FROM and BASIC_SHAPE_TO.

Path 1:SERIES/PRODUCT_GROUPS/PRODUCT_GROUP/ITEMS/ITEM/BASIC_PROFILE/CARCASE_
BASIC_SHAPE/BASIC_SHAPE_PARAMETERS/BASIC_SHAPE_PARAMETER



2.8.1

[...]

If the values in the elements BASIC_SHAPE_NOMINAL_VALUE (path 1), BASIC_SHAPE_FROM (path 1) and BASIC_SHAPE_TO (path 1) are equal, neither changes of these parameters are permitted, nor custom-made items are available.

If an item is defined as electrical appliance the measurement B(Width), H(Height) and T(Depth) are required.

If necessary (e.g. for diagonal corner blinds) values for the basic shapes 21, 24 and 25 can be given in 1/10 mm.
Example: 27,3 mm => value: 0027.3

[...]

3.0.0

[...]

If the values in the elements BASIC_SHAPE_NOMINAL_VALUE (path 1), BASIC_SHAPE_FROM (path 1) and BASIC_SHAPE_TO (path 1) are the same, these parameters must not be changed, a factory modification of these parameters as a special design is also not possible.

If a graphically relevant article is created (basic shape number not equal to 0), the dimensions width, height and depth are required.

If it is absolutely necessary (for example for diagonal corner panels), 1/10 mm values can be specified for the basic shapes 21, 24 and 25. Example: 27.3 mm => element content : 0027.3

[...]

Since the restriction for specifying the dimensional parameters does not only apply to E-appliances, the description in the BASIC_SHAPE_PARAMETER element had to be adapted.



2.8.1

This element defines the features of a feature class. All features of the complete database are defined in this element. In case of a finish option (cf. table standard variations, flag "A") neither texture (TEXTUR) nor colour values (COLOR) are permitted. The assignment of brightness and transparency is optional. In case they are defined they have priority over the colour variations.

3.0.0

In this element, the options for a feature are defined and all options to be modified in the dataset are stored. If these are special colours, separate OPTIONs must be created for each colour scheme (e.g. RAL, NCS, etc...). (see also: Best Practices/Special Colours)

In order to avoid incorrect handling of special colours in the future, the description in the OPTION element has been supplemented and a best practice has been added to the documentation.

Excerpt Best Practice:

Special colours

Not all possible spot colours can be created individually in an IDM catalogue.

Therefore, it is necessary to define a structure that enables the planning systems to show the applicable special colours.

For this purpose, an option is to be created for each standardised colour scheme, e.g. RAL, NCS, SIKKENS, etc.

Example 1:

The supplier offers a desired colour in the RAL and NCS colour schemes for various design elements.

Correct:

```

<OPTION FEATURE_NO="101" OPTION_KEY="NCS">
  <OPTION_TEXT>
    <LANGUAGE ISO_LANGUAGE_ID="DE">
      <TEXT>
        NCS-Lackierung
    </TEXT>
  </LANGUAGE>
  <OPTION_COMMENT_TEXT>
  <MINIMUM_DELIVERY_TIME>
</OPTION_TEXT>
</OPTION>
<OPTION FEATURE_NO="101" OPTION_KEY="RAL">
  <OPTION_TEXT>
    <LANGUAGE ISO_LANGUAGE_ID="DE">
      <TEXT>
        RAL-Lackierung
    </TEXT>
  </LANGUAGE>
  <OPTION_COMMENT_TEXT>
  <MINIMUM_DELIVERY_TIME>
</OPTION_TEXT>
</OPTION>

```

Wrong:

```

<OPTION FEATURE_NO="501" OPTION_KEY="MSLS">
  <OPTION_TEXT>
    <LANGUAGE ISO_LANGUAGE_ID="DE">
      <TEXT>
        RAL/NCS-Farben
    </TEXT>
  </LANGUAGE>
</OPTION_TEXT>
</OPTION>

```

[...]

A = Added = Adding new elements or attributes

C = Changed = Changes to existing elements, attributes or descriptive texts.

R = Removed = Deletion of elements or attributes

F = Fixed = Error corrections to existing elements, attributes or descriptive texts.



2.8.1

This element is used for the definition and description of restrictions. These restrictions define rules for technically possible combinations but do not contain any planning advices. This is necessary to prevent the dealers from unnecessary restrictions in the course of kitchen planning.

Restrictions are assigned to series, styles or items by references. All test procedures defined in this element have to be referenced from series, styles or items.

Restrictions which are referenced from series or styles may not be referenced from items. Restrictions which are referenced from items have priority over restrictions referenced from series or styles

The element OPTION_REF can be set up in different ways. According to the filling levels in the elements FEATURE_1_NO, FEATURE_2_NO and FEATURE_3_NO test procedures can be defined as 0-level, 1-level or 2-level or 3-level.

[...]

3.0.0

This element is used for the definition and description of restrictions. These restrictions define rules for technically possible combinations but do not contain any planning advices. This is necessary to prevent the dealers from unnecessary restrictions in the course of kitchen planning.

Restrictions are assigned to series, styles or items by references. All test procedures defined in this element have to be referenced from series, styles or items.

Restrictions which are referenced from series or styles may not be referenced from items. Restrictions which are referenced from items have priority over restrictions referenced from series or styles

The element OPTION_REF can be set up in different ways. According to the filling levels in the elements FEATURE_1_NO to FEATURE_5_NO, test procedures can be defined as 0-level, 1-level, 2-level, 3-level, 4-level or 5-level.

[...]

Due to the extension of the rules from 3 to 5 levels, the description in the element RESTRICTION has to be adapted.



9.9. C Adjustment in FEATURE_1_NO to FEATURE_3_NO to 5-step

Decision : 2022-03-22

FEATURE_1_NO/FEATURE_2_NO/FEATURE_3_NO

2.8.1

The attributes FEATURE_1_NO, FEATURE_2_NO, FEATURE_3_NO define the different variation types which are used in the restrictions. At the same time the attributes define the sequence of the variation types in the restrictions.

In addition this attribute can be used to avoid an alternation of the variation types in one restriction.

3.0.0

The attributes **FEATURE_1_NO to FEATURE_5_NO** define the different features which are used in the restrictions. The attributes also define the sequence of the features in the restrictions.

In addition, it is possible to check that the features do not change within a restriction.

Due to the extension of the rules from 3 to 5 levels, the description in the elements FEATURE_1_NO, FEATURE_2_NO and FEATURE_3_NO must be adapted.

9.10. C Changed description of the attribute VALIDATION_TYPE

Decision : 2022-03-22

2.8.1

The attribute VALIDATION_TYPE defines a restriction as either colour-length or variation test procedure. In case of a colour-length test procedure the element MIN/MAX_DIMENSION under OPTION_COMBINATION has to be filled in.

0 = variation test procedure (formerly record type 270)

1 = colour-length test procedure (formerly record type 405)

3.0.0

The attribute VALIDATION_TYPE defines a restriction as either colour-length or variation restriction.

0 = variation restriction

1 = colour-length restriction

If it is a color length restriction, a MIN/MAX_DIMENSION must be filled for each check under OPTION_COMBINATION. **The color length restriction is complementary to the variant restriction. It only restricts the dimensions of the color variants named therein and does not represent a general availability check.**

Due to different interpretations, the colour length restriction has been described more clearly in the element VALIDATION_TYPE.



Unreleased

Presentation of all changes planned for version 3.1.0



Contact

Daten Competence Center e. V.

Goebenstraße 4-10

32052 Herford

Info: www.dcc-moebel.org

Dr.-Ing. Olaf Plümer

E-mail: pluemer@dcc-moebel.org

Phone: +49 52 21 / 12 65-37

Anika Degenhard

E-mail: degenhard@dcc-moebel.org

Phone: +49 52 21 / 12 65 - 38